



GENERATING SET GE 20 YSXC

The images are for reference



FEATURES

- Automatic voltage regulation AVR with three-phase sensing
- External fuel supply with anti-shock protection
- Engine cowling side, can be completely opened, which facilitates all maintenance operations
- The recessed control panel is lockable and houses the sockets and machine
- Central lifting eye
- Ready for connection to automatic transfer unit EAS (AMF + ATS)
- Meets EC directives for noise and safety



water cooled



diesel



three-phase power



electric



super silenced

POWER RATINGS	
* Stand-By three-phase power	20 kVA (16 kW) / 400V / 28.9 A
* PRP three-phase power	18 kVA (14.4 kW) / 400V / 26 A
* PRP single-phase power	7 kVA / 230V / 30.4A
* COP single-phase power	/
Frequency	50 Hz
Cos φ	0.8

* Output powers according to ISO 8528-1

DEFINITION

Valid declared powers up to the followings environmental conditions: temperature 25°C, altitude 100 meters above sea level

LTP power: stand-by power: Maximum available power for use with variable loads for a yearly number of hours limited at 500 h. No overload is admitted.

PRP power: continue power with variable loads. Maximum power for use with variable loads for a yearly illimited nubers of hours.

COP power: continuous power with constant load. Maximum power for use with constant loads for a yearly unlimited numbers of hours.

ENGINE 1500 RPM

4 STROKE, DIRECT INJECTION, NATURAL ASPIRATED	
Model	YANMAR 4TNV88
* Stand-By net power	18 kW (24.5 hp)
* PRP net power	16.4 kW (22.3 hp)
* COP net power	/
Cylinders / Displacement	4/ 2.19 lit
Bore / Stroke	88 / 90 (mm)
Compression ratio	20 : 1
BMEP (Brake Mean Effective Pressure : LTP - PRP)	/
Speed governor type	Mechanical
FUEL CONSUMPTION	
110 % (Stand-by power)	5 lit./h
100 % to PRP	4.5 lit./h
75 % to PRP	3.4 lit./h
50 % to PRP	2.6 lit./h
COOLING SYSTEM	
Total system cap. - only engine	7 lit. - 2.7 lit.
Fan air flow	50 m ³ /min.
LUBRICATION SYSTEM	
Total oil system capacity	/
Oil capacity in sump	3.4 lit. (min) - 7.4 lit. (max)
Oil consumption at full load	/

* Output powers according to ISO 3046-1

EXHAUST SYSTEM	
Maximum exhaust gas flow	/
Max. exhaust gas temp.	520 °C
Maximum back pressure	9.8 kPa (0.1 bar)
External diameter exhaust pipe	/
ELECTRICAL SYSTEM	
Starter motor power	1.4 kW
Battery charging alternator cap.	40 A
Cold start	- 15 °C
With cold start aid	/
AIR FILTER	
Combustion air flow	1.48 m ³ /min.
HEAT REJECTED AT FULL LOAD	
To exhaust system	/
To water and oil	/
Radiated to room	/
To charge cooler	/



ALTERNATOR

SYNCHRONOUS, THREE-PHASE, SELF-EXCITED, SELF-REGULATED, BRUSHLESS	
Continuous power	20 kVA
Stand-by power	23 kVA
Three phase voltage	380-415 Vac
Frequency	50 Hz
Cos φ	0.8
Model A.V.R.	HVR-30 (3ph. sensing)
Voltage regulation acc.	± 1 %
Sustained short circuit current	3 I _n
Transient dip (100% load)	10 %
Recovery time	≤ 3 sec.
Efficiency at 100% load	86.1 % (400V - Cos φ 0.8)
Insulation	Classe H
Connection - Terminals	Stella - N°12
Electromagnetic compatibility (R.F.I. suppr.)	EN 55011
Waveform distortion - THD	< 3 %
Telephone interference - THF	/

REACTANCES (20 kVA - 400V)	
Direct axis synchronous - X _d	242 %
Direct axis transient - X' _d	19 %
Subdirect axis transient - X'' _d	9 %
Quadrature axis synchronous - X _q	133 %
Quadr. axis subtransient - X'' _q	/
Negative sequence - X ₂	/
Zero sequence - X ₀	/
TIME CONSTANTS	
Transient - T' _d	0.007 sec
Subtransient - T'' _d	0.005 sec
Open circuit - T' _{do}	0.103 sec
Armature - T _a	/
Short-circuit ratio K _{cc}	0.57
Cooling air flow	0.1 m ³ /sec.
Coupling Bearing	Diretto SAE 4 - 7 1/2 - N°1

GENERAL SPECIFICATIONS

Fuel tank capacity	60 lt.
Running time (75% to PRP)	17.5 h
Starter battery	12 Vdc - 74Ah
IP protection degree	IP 23

* Measured acoustic power L _{WA} (pressure L _{pA})	93 dB(A) (68 dB(A) @ 7m)
* Guaranteed acoustic power L _{WA} (pressure L _{pA})	94 dB(A) (69 dB(A) @ 7m)
Performance class (ISO 8528)	G2

* Acoustic power according to European Directive 2000/14/CE

CONTROL PANEL

- Controller EP6
- Fuel level gauge
- Siren
- Emergency stop button
- Local-Remote Start switch
- EAS plug
- TCM 35 remote control plug
- Voltmeter switch 0 - RS - ST - TR
- Four pole earth leakage with integral over-current circuit breaker - 30mA
- Output sockets: 1x 400V 32A 3P+N+T CEE
1x 400V 16A 3P+N+T CEE
1 230V 16A 2P+T CEE
1 230V 16A 2P+T SCHUKO
- Four pole circuit breaker 400V / 16A sockets
- Circuit breakers for 230V 16A sockets
- Earth terminal (PE)

CONTROL PANEL VERSION WITH OUTPUT SOCKETS	
SOCKETS	1x 400V 63A 3P+T CEE
Every 16A and 32A socket is protected by its own circuit breaker and GFI 30mA	1x 400V 32A 3P+T CEE 1x 400V 16A 3P+T CEE 2x 230V 16A 2P+T CEE

EP6 CONTROLLER CHARACTERISTICS	
Operating mode	OFF - MAN. - AUTO
Display	4-digits display
LEDs	Engine is running AUTO mode
Buttons/controls	Starter key AUTO button N° 5 buttons for controller programming
Measures	Generator voltage Generator current Frequency Engine speed Battery voltage Charger battery voltage Hoursmeter
Alarms	Low oil pressure High temperature Belt break Low level fuel Emergency stop button Starting failure Over-under generator voltage Over-under frequency Over-under speed High-low battery voltage Overload generator Internal memory failure
Functions	Remote starting (only to AUTO) Cold start aid Automatic periodic test (only to AUTO) Generator contactor control

WEIGHT - DIMENSIONS AND ACCESSORIES

GE 20 YSXC





DRY WEIGHT MACHINE:

- 610 kg

Generating set pictured may include optional accessories.



DIMENSIONS DRAW

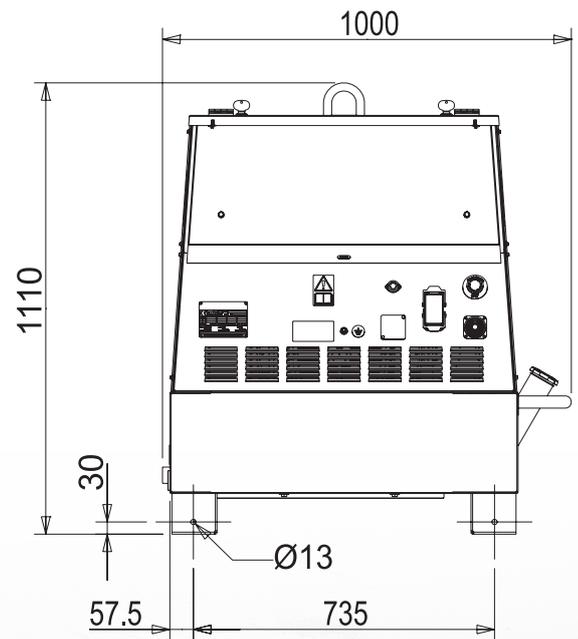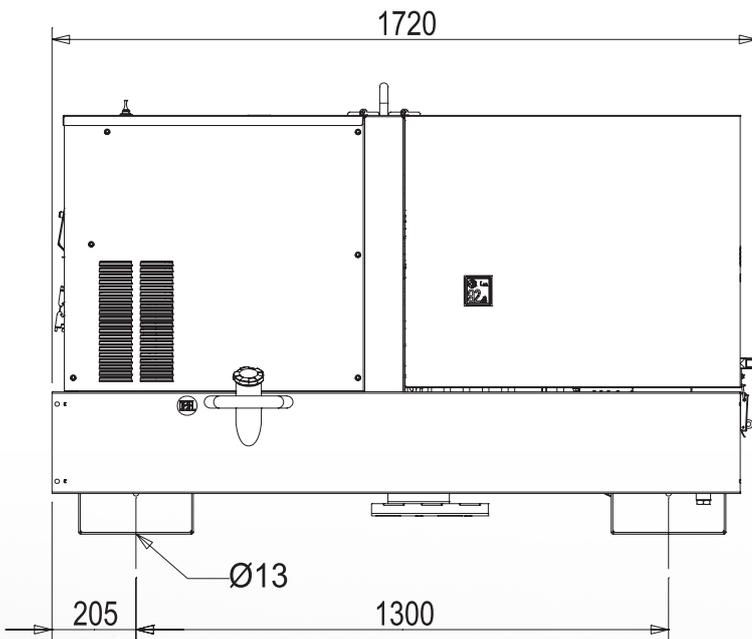

OPTIONS ON REQUEST

- Remote control TCM35
- Automatic transfer EAS 28-809
- Locking Fuel Cap
- Earthing kit
- Site tow CTL22
- Road trailer CTV1/0
- Road trailer CTV1/S

VERSIONS ON REQUEST

- /

FACTORY INSTALLATION OPTIONS

- Engine water heater WH
- Spark arrestor
- Gauges - water temperature and oil pressure
- Radio control

GENERAL INFORMATION

COMPLIANCE GENERATING SETS WITH EC DIRECTIVES AND STANDARDS

- 2006/42 / EC (Machines Directive)
- 2014/35 / EU (Low Voltage Directive)
- 2014/30 / EU (EMC Directive)
- 2000/14 / EC (Directive Acoustic Emission for machines for use outdoors)
- ISO 8528 (Reciprocating internal combustion engine driven alternating current generating sets)



ISO 9001:2008 - Cert. 0192

WARRANTY

All devices are covered by the manufacturer's warranty.

The company reserves the right to change this specification without notice. For further information please contact the sales department.

© MOSA - Viale Europa, 59 - 20090 Cusago (Milano) - Italy - phone +39-0290352.1 - fax + 39-0290390466 E-mail: info@mosa.it Web site: www.mosa.it

