


ENGINES / AMGE 2V 680



The AMGE 2V 680 range includes petrol engines with a horizontal shaft configuration. They are versatile and suitable for a wide array of applications in professional, construction, and agriculture sectors. The motors in this range can be installed in agricultural machinery, construction equipment, generators, and stump grinders.

MODEL	AMGE 2V 680
ENGINE TYPE	V-TWIN twin-cylinder engine, Horizontal shaft, Air-cooled and oil cooler, 4-stroke
POWER (Hp/Kw)	20.5 / 15.1
DISPLACEMENT (cc)	680
RPM	3600
BORE/STROKE RATIO (mm)	78x71
COMPRESSION RATIO	8.5:1
STARTING	Electric
FUEL TYPE	Unleaded petrol
OIL	SAE 10W 40 SJ Multi-grade
OIL PAN CAPACITY (litres)	1.9
AIR FILTER	Dry
OVERALL DIMENSIONS (mm)	388 x 457 x 452
DRY WEIGHT (Kg)	42

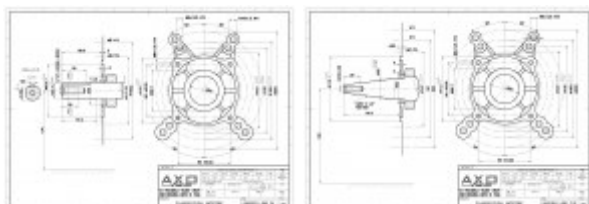

AVAILABLE VARIANTS

AMGE 2V 680 F10 Albero Conico, Ø 35 mm, Avv. Elettrico

AMGE 2V 680 F4 Albero Cilindrico, Ø 25,4 mm, Avv. Elettrico

<http://www.axo-group.com/en/products/engines/amge-2v-680.php>

AXO GROUP SRL - Via Spallanzani, 15 - 42024 Castelnovo di Sotto (RE)
Partita IVA, Codice Fiscale IT 02342860356 - Tel: 0522 688175 Fax: 0522 483731