


ELETTROPOMPE AUTOADESCANTI IN BRONZO
BRONZE SELF PRIMING ELECTRIC PUMPS
ELECTROPOMPES AUTOAMORÇANTES EN BRONZE



G3TMK-A/B 4 kW

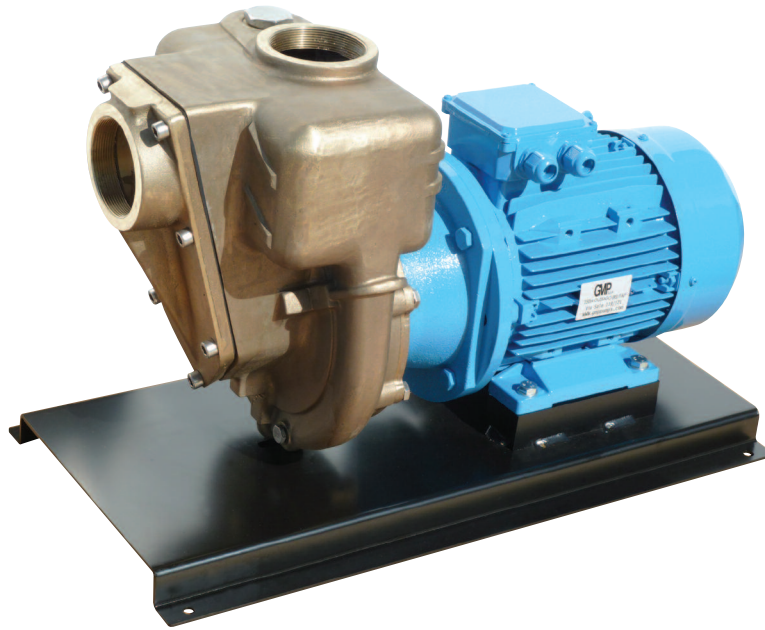

DESCRIZIONE

Elettropompa autoadescante in bronzo realizzata in versione monoblocco a girante multipalare aperta a rasamento, particolarmente adatta per uso marino e circolazione di acqua di mare. Corpo, flangia, girante e valvola in bronzo, albero in acciaio inox.
Per alta prevalenza. Una valvola a clapet posta all'interno del corpo pompa impedisce lo svuotamento della pompa dopo l'arresto.

DESCRIPTION

*Bronze self priming electric pump monobloc execution with multi-blades open impeller, suitable for pumping sea water. Pump casing, flange, impeller and valve are in bronze; the shaft is in stainless steel.
High pressure.
A suitable non return valve is placed inside the pump body to avoid the empty after stopping.*

DESCRIPTION

*Electropompe autoamorçantes monobloc en bronze avec turbine ouverte plusieurs pales, indiquée pour d'eau de mer.
Corps, bride, turbine et valve sont en bronze; arbre en acier inox.
Haute pression.
Une valve à clapet est placée dans le corps de la pompe pour éviter le vidage après l'arrêt.*

CARATTERISTICHE

Altezza massima di aspirazione: 6 m.
Max temperatura del liquido: +70°C
Max passaggio corpi solidi: 8 mm
Portata massima: 50 m³/h
Prevalenza massima: 3,5 bar
Ø aspirazione e mandata: 3"G

FEATURES

Max. suction depth: 6 m.
Max. liquid temperature: +70°C
Max. solids diameter: 8 mm
Max. delivery: 50 m³/h
Max. manometric head: 3,5 bar
Ø inlet / outlet: 3"G

CARACTERISTIQUES

Hauteur d'aspiration maximale: 6 m.
Température Max.: +70°C
Max. diamètre des solides: 8 mm
Débit maximum: 50 m³/h
Hauteur manométrique: 3,5 bars
Ø aspiration & refoulement: 3"G

VERSIONE

Corpo pompa: Bronzo
Corpo valvola: Bronzo
Flangia porta tenuta: Bronzo
Girante: Bronzo
Albero motore: Acciaio Inox AISI 316
Tenuta mecc.: Nbr/Carbone/AISI 316/Allumina

VERSION

Pump body: Bronzo
Valve body: Bronzo
Seal holding disc: Bronzo
Impeller: Bronzo
Motor shaft: Stainless Steel AISI 316
Seal: Nbr/Carbon/AISI 316/Alumina

EXECUTION

Corps de pompe: Bronze
Corps valve: Bronze
Disque porte-garniture: Bronze
Turbine: Bronze
Arbre moteur: Acier inox AISI 316
Garniture: Charbon/AISI 316/ Alumine

VERSIONI SPECIALI

Tenute meccaniche materiali diversi
Tensioni speciali
Frequenza 60Hz

SPECIAL VERSIONS

*Different mechanical seals
Special voltages
Frequency 60Hz*

VERSIONS SPECIALES

*Garnitures mécaniques différentes
Voltages spéciaux
Fréquence 60Hz*

DATI TECNICI

TECHNICAL DATA

DONNES TECHNIQUES

Tipo Type	P2 (kW)	V (Volt)	Freq. (Hz)	Corrente nominale Rated current Intensité (A)	Protez. Protection	Giri/min RPM Tours/min	Cond. (µF)	Peso Weight Poids (Kg.)	A/B/C (mm)	
G3TMK-A/B T.	4	400/690	50	7,8 / 4,5	IP 55	2900	-	90	410x770x645	



ELETTROPOMPE AUTOADESCANTI IN BRONZO

BRONZE SELF PRIMING ELECTRIC PUMPS

ELECTROPOMPES AUTOAMORÇANTES EN BRONZE

G3TMK-A/B 4 kW

CURVE DI PRESTAZIONE


Tolleranze e curve secondo UNI EN ISO 9906
Appendice A

PERFORMANCES CURVES

Tolerance and curves according to UNI EN ISO 9906
Attachment A

COURBES DE PERFORMANCES



Tolérance et courbes conformes aux normes UNI EN ISO 9906
Annexe A

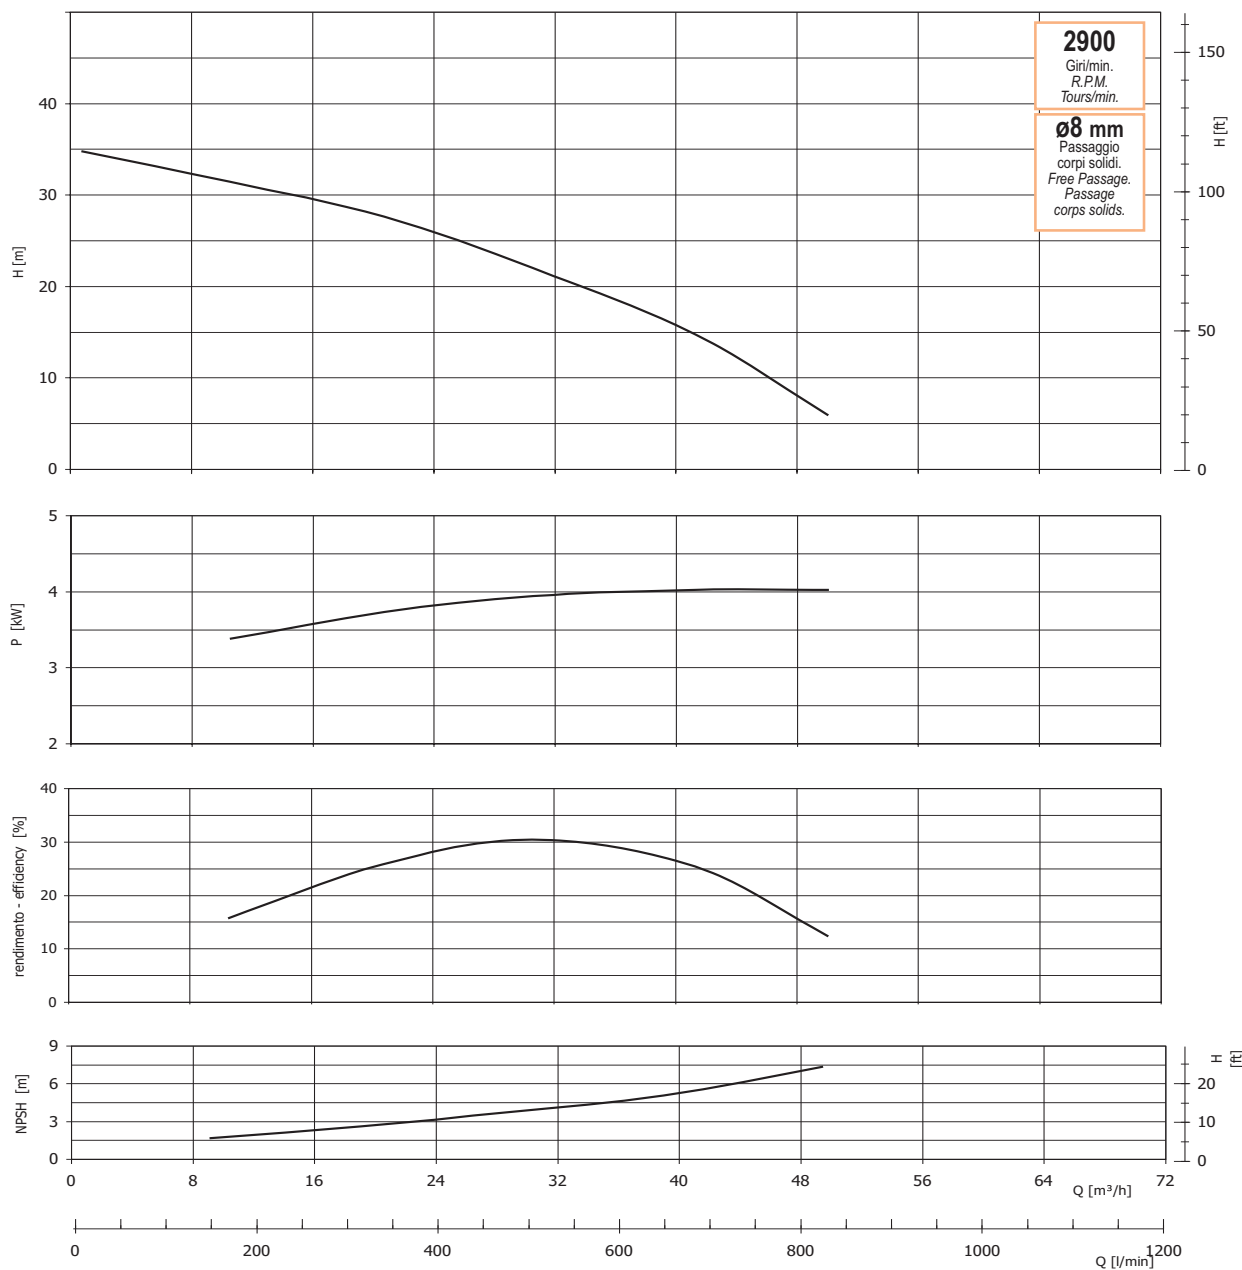

DIMENSIONI

DIMENSIONS

DIMENSIONS

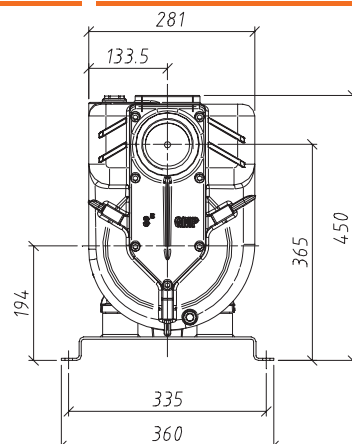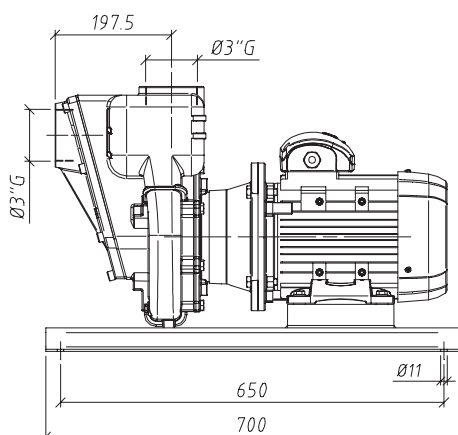

La GMP si riserva la facoltà di modificare senza preavviso i dati riportati in questo catalogo. - GMP can alter without notifications the data mentioned in this catalogue. - GMP se réserve le droit de modifier sans préavis les données techniques dans ce catalogue.

G.M.P. S.p.A. - Via Sale, 119/121 - 25064 Gussago (BS) Italy - Vendite Italia 030.2775420_421 - Export +39.030.2775412_414
www.gmppumps.com - info@gmppumps.com