


ELETTROPOMPE AUTOADESCANTI IN BRONZO
BRONZE SELF PRIMING ELECTRIC PUMPS
ELECTROPOMPES AUTOAMORÇANTES EN BRONZE



B4ZPM-A/B 30 kW

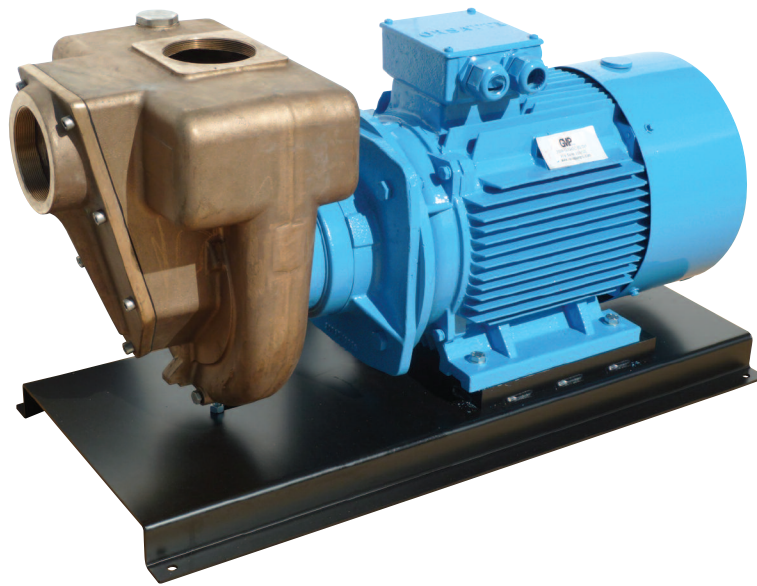

DESCRIZIONE

Elettropompa autoadescante in bronzo, collegata al motore elettrico tramite giunto elastico, a girante tipo chiuso, particolarmente adatta per uso marino e circolazione di acqua di mare. Corpo, flangia, girante e valvola in bronzo, albero in acciaio inox. Per alta prevalenza. Una valvola a clapet posta all'interno del corpo pompa impedisce lo svuotamento della pompa dopo l'arresto.

DESCRIPTION

Bronze self priming electric pump coupled with electric motor by coupling, with closed impeller, suitable for pumping sea water. Pump casing, flange, impeller and valve are in bronze; the shaft is in stainless steel. High pressure. A suitable non return valve is placed inside the pump body to avoid the empty after stopping.

DESCRIPTION

Electropompe autoamorçante en bronze couplée par joint avec moteur. Turbine fermée. Indiquée pour d'eau de mer. Corps, bride, turbine et valve sont en bronze; arbre en acier inox. Haute pression. Une valve à clapet est placée dans le corps de la pompe pour éviter le vidage après l'arrêt.

CARATTERISTICHE

Altezza massima di aspirazione: 6 m.
Max temperatura del liquido: +70°C
Max passaggio corpi solidi: 23 mm
Portata massima: 120 m³/h
Prevalenza massima: 7,0 bar
Ø aspirazione e mandata: 4"G

FEATURES

Max. suction depth: 6 m.
Max. liquid temperature: +70°C
Max. solids diameter: 23 mm
Max. delivery: 120 m³/h
Max. manometric head: 7,0 bar
Ø inlet / outlet: 4"G

CARACTERISTIQUES

Hauteur d'aspiration maximale: 6 m.
Température Max.: +70°C
Max. diamètre des solides: 23 mm
Débit maximum: 120 m³/h
Hauteur manométrique: 7,0 bars
Ø aspiration & refoulement: 4"G

VERSIONE

Corpo pompa: Bronzo
Corpo valvola: Bronzo
Flangia porta tenuta: Bronzo
Girante: Bronzo
Albero motore: Acciaio Inox AISI 316
Tenuta mecc.: Nbr/Carbone/AISI 316/Allumina

VERSION

Pump body: Bronzo
Valve body: Bronzo
Seal holding disc: Bronzo
Impeller: Bronzo
Motor shaft: Stainless Steel AISI 316
Seal: Nbr/Carbon/AISI 316/Alumina

EXECUTION

Corps de pompe: Bronze
Corps valve: Bronze
Disque porte-garniture: Bronze
Turbine: Bronze
Arbre moteur: Acier inox AISI 316
Garniture: Charbon/AISI 316/ Alumine

VERSIONI SPECIALI

Tenute meccaniche materiali diversi
Tensioni speciali
Frequenza 60Hz

SPECIAL VERSIONS

*Different mechanical seals
Special voltages
Frequency 60Hz*

VERSIONS SPECIALES


*Garnitures mécaniques différentes
Voltages spéciaux
Fréquence 60Hz*

DATI TECNICI

TECHNICAL DATA

DONNES TECHNIQUES

Tipo Type	P2 (kW)	V (Volt)	Freq. (Hz)	Corrente nominale Rated current Intensité (A)	Protez. Protection	Giri/min RPM Tours/min	Cond. (µF)	Peso Weight Poids (Kg.)	A/B/C (mm)
B4ZPM-A/B T.	30	400/690	50	50,5 / 28,6	IP 55	2950	-	360	600x1200x130





ELETTROPOMPE AUTOADESCANTI IN BRONZO

BRONZE SELF PRIMING ELECTRIC PUMPS

ELECTROPOMPES AUTOAMORÇANTES EN BRONZE

B4ZPM-A/B 30 kW

CURVE DI PRESTAZIONE


Tolleranze e curve secondo UNI EN ISO 9906
Appendice A

PERFORMANCES CURVES

Tolerance and curves according to UNI EN ISO 9906
Attachment A

COURBES DE PERFORMANCES



Tolérance et courbes conformes aux normes UNI EN ISO 9906
Annexe A

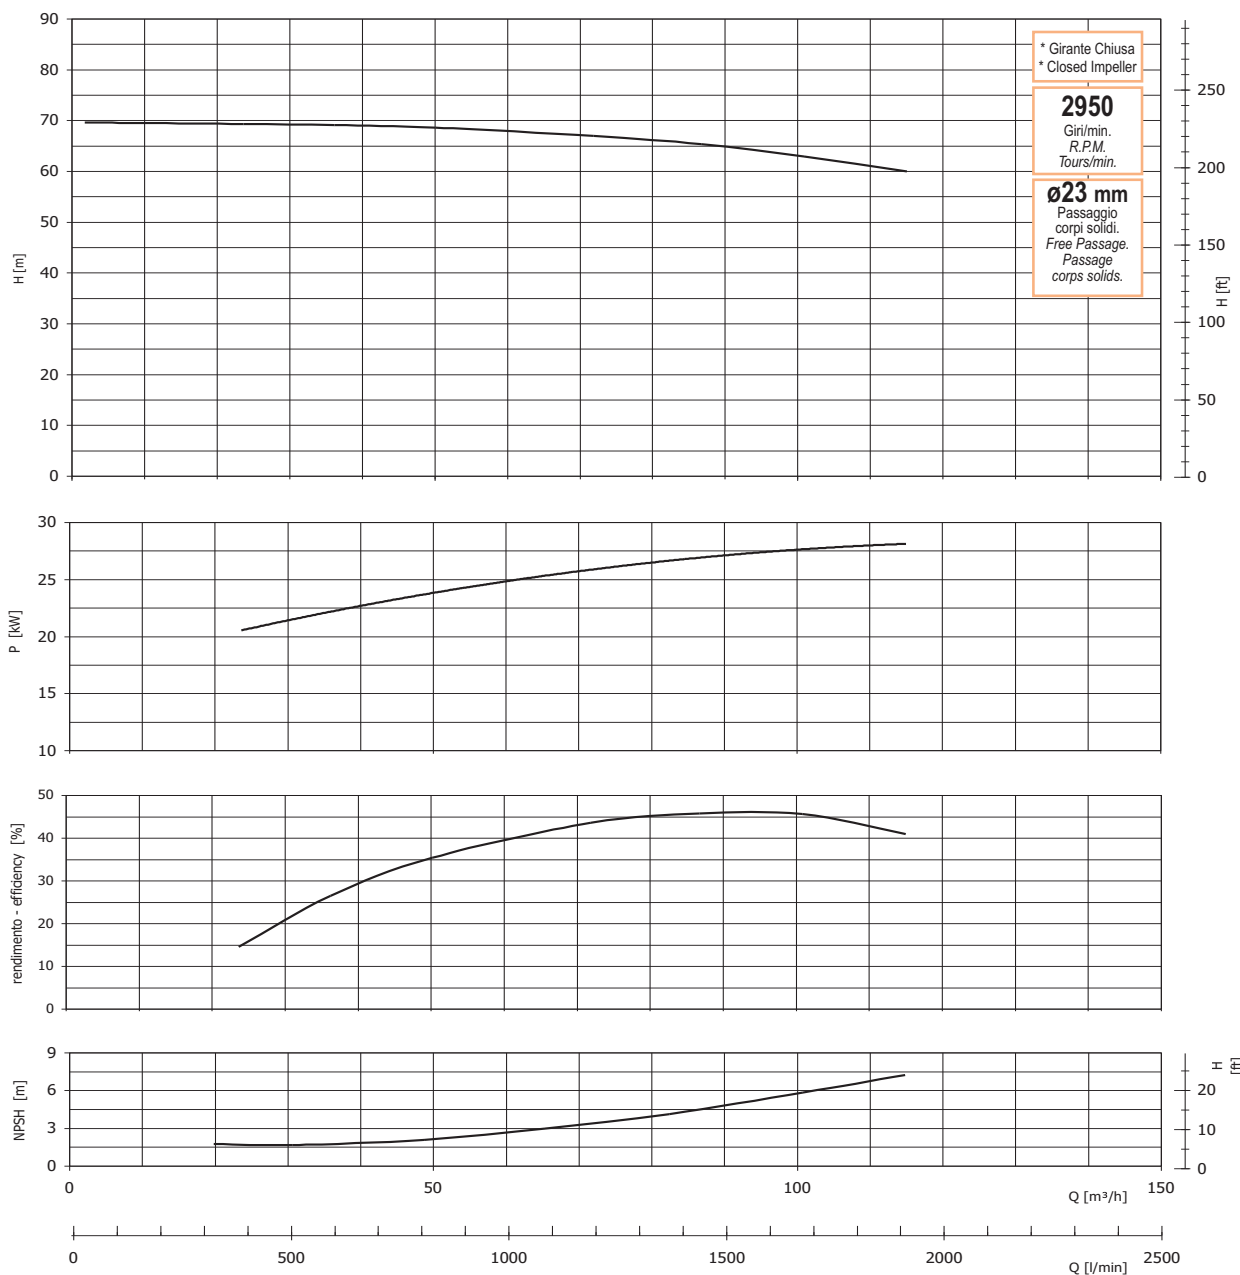

DIMENSIONI

DIMENSIONS

DIMENSIONS

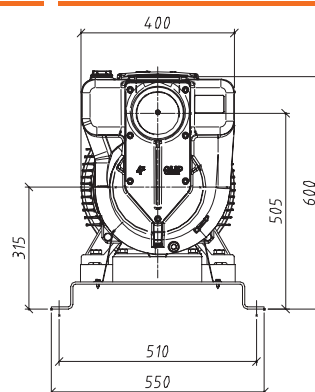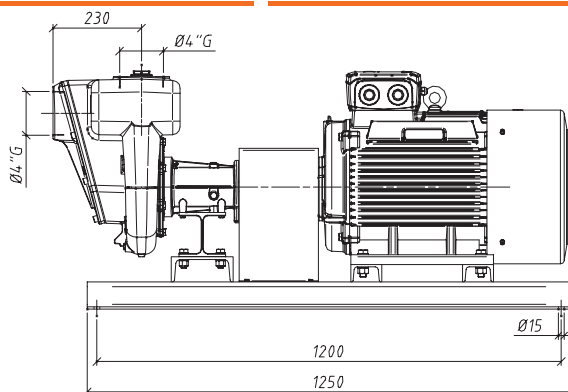

La GMP si riserva la facoltà di modificare senza preavviso i dati riportati in questo catalogo. - GMP can alter without notifications the data mentioned in this catalogue. - GMP se réserve le droit de modifier sans préavis les données techniques dans ce catalogue.

G.M.P. S.p.A. - Via Sale, 119/121 - 25064 Gussago (BS) Italy - Vendite Italia 030.2775420_421 - Export +39.030.2775412_414
www.gmppumps.com - info@gmppumps.com