

CURVE CARATTERISTICHE - *PERFORMANCES*Pompa tipo - *Pump type***B3KQ-A -/ST -/B 2,2kW**COSTANTI DI PROVA - *TEST CONSTANTS*

n = 2850 1/min

t = 15°C

 $\rho = 1000 \text{ kg/m}^3$ $\varnothing \text{ gir./impeller} = 116,5 \text{ mm}$

h - pale/blades = 27,5 mm

n° pale/blades = 3

TABELLA N°

A4000002

27/09/2007 Rev-0

3"G

DN (aspirazione pompa - pump suction)

200





DN (tubo aspirazione - suction pipe)

3"G

DN (mand. pompa - pump delivery)

100

DN (tubo mandata - delivery pipe)

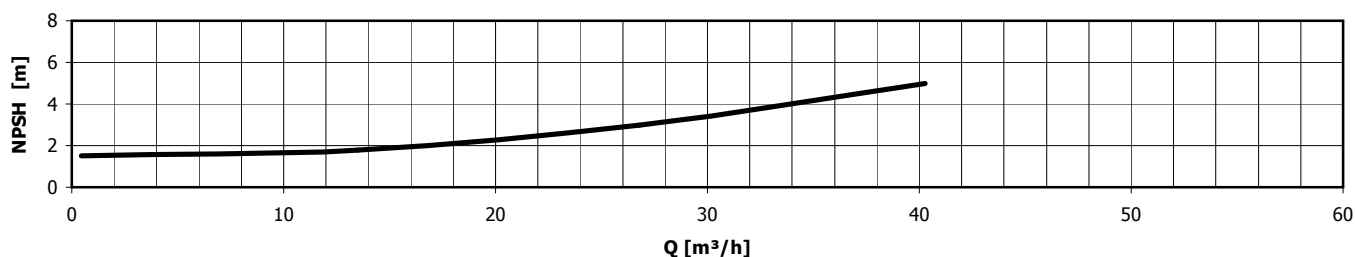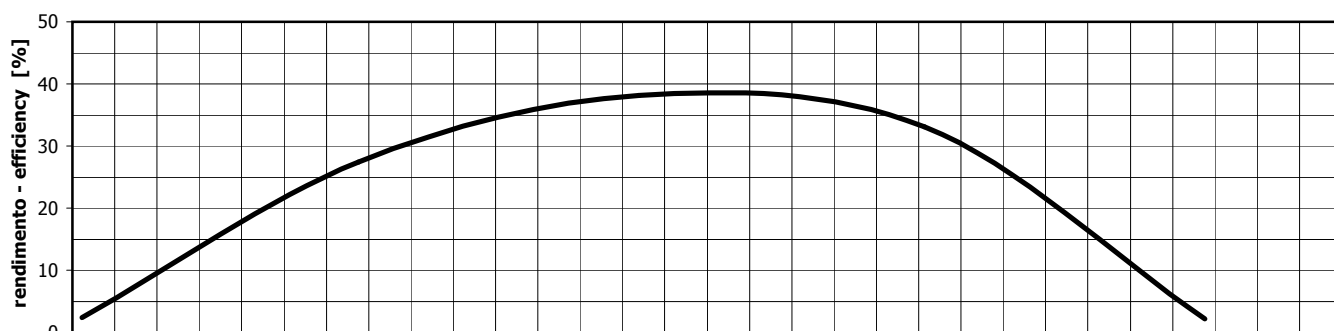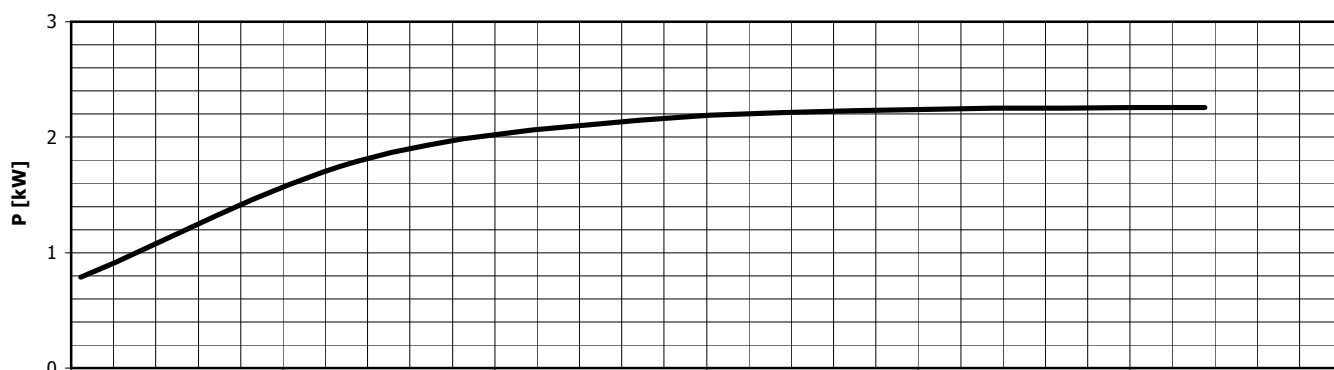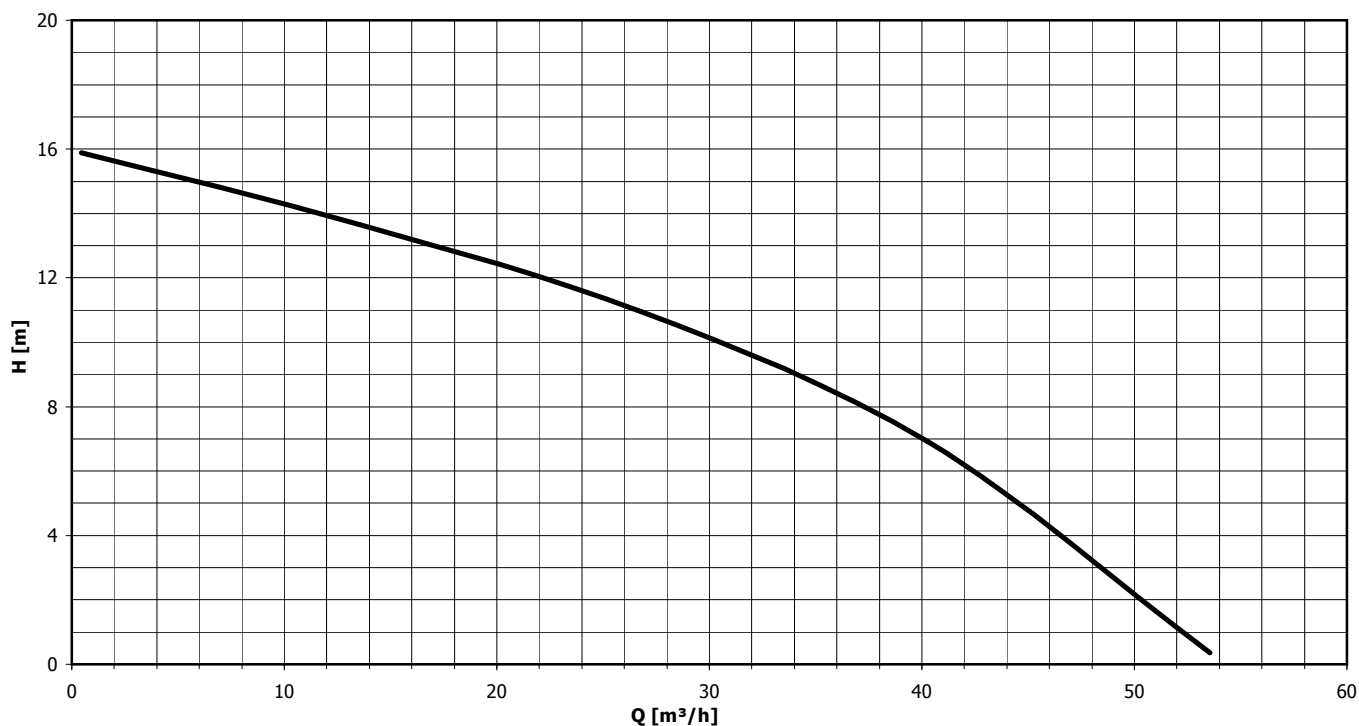

Le caratteristiche di funzionamento e di targhetta si intendono per servizio continuo ed acqua pulita, con altezza manometrica massima di aspirazione di 1 m c.a. Per altezze manometriche superiori e fino ad un massimo di 6 m c.a., le caratteristiche si riducono nei valori di portata. La tubazione aspirante deve essere assolutamente stagna. The operating characteristics of the label are to be understood for continuous service and with clear water a max manometric suction height of approximately 1 m. For higher manometric heights and up to a max of approximately 6 m, the characteristics decrease in the various delivery data. The suction piping be absolutely hermetic.