



MG 5000 I-HE 5,3 It

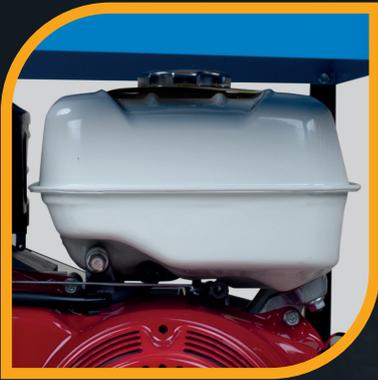

5,3 It Fuel Tank

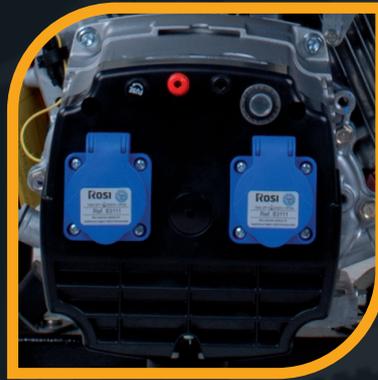

Front Panel



Handles



Stage V

We offer now what others will do tomorrow.



GenSet s.p.a.

Via Stazione 5 - 27030
Villanova d'Ardenghi (PV) - Italy
Phone: +39-0382-5091

commerciale@genset.it
www.genset.it

 **GenSet**
Next Gen technology
for top business.

PORTABLE SINGLE-PHASE POWER GENERATOR
OUTPUT POWER 5kVA
PETROL ENGINE 3000 RPM
FUEL TANK 5,3 LT

Standard Features	<ul style="list-style-type: none"> • Low oil level shutdown device • 2 x 230 V - 50 Hz single-phase Schuko socket protected by circuit breaker • 12Vdc battery charger outlet protected by fuse
Options available as factory options	<ul style="list-style-type: none"> • Versions with different voltages • 60Hz version • Automatic voltage regulator (AVR)
Accessories on request	<ul style="list-style-type: none"> • Trolley: two-wheels and handles
Noise level	<ul style="list-style-type: none"> • Lwa 96 (71 dB a 7 mt)
AC generator - 50Hz	<ul style="list-style-type: none"> • Type: synchronous • Single-phase max. power : 5 kVA - 230 V • Battery charger power: 120 W - 12 V - 10 A - DC • Power Factor: $\cos \phi$ 0,8
Petrol Engine 3000 rpm	<ul style="list-style-type: none"> • Type: Honda GX 270 OHV - 1 cyl. 7,8 HP (5,8 kWm) - 270 cm³ • Cooling system: air • Starting system: recoil • Fuel tank capacity: 5,3 lt • Fuel consumption @ 75%: 2,2 lt/h
Other features	<ul style="list-style-type: none"> • Insulation Class: H • Ambient temperature: 40 °C (*) • Altitude: 1000 mt (*) • Mechanical Protection: IP 23 • Dimensions (L x W x H): 770 x 480 x 625 mm • Dry weight: 60 kg

(*) - For altitude and temperature values higher than those listed above, please consult the manufacturer to verify the available power.
 In line with our continued development, innovation and voice of customer program, we reserve the right to change data without notice.