


MPM 5-180 I-D/AE-Y



Control Panel

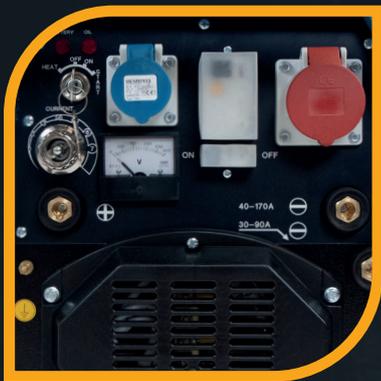

48V Power Source



Yanmar Engine



Stage V

We offer now what others will do tomorrow.



Genset s.p.a.

Via Stazione 5 - 27030
Villanova d'Ardenghi (PV) - Italy
Phone: +39-0382-5091

commerciale@genset.it
www.genset.it

 **GenSet**
Next Gen technology
for top business.

**PORTABLE ENGINE DRIVEN WELDER/GENERATOR
DELIVERS 170A OF DC WELD OUTPUT
THREE-PHASE AND SINGLE-PHASE AUXILIARY POWER AVAILABLE
DIESEL ENGINE 3000 RPM**

Standard Features	<p>Processes: SMAW (stick)</p> <ul style="list-style-type: none"> • Warning lights for: <ul style="list-style-type: none"> - battery charger failure - low oil pressure • 12V battery • Earth Leakage Circuit Breaker • Power output protection • 1 x 16A 400V three-phase EEC socket • 1 x 16A 230V single-phase EEC socket • 48V output • Voltmeter
Options available as factory options	<ul style="list-style-type: none"> • Version with different voltages • 60Hz version • Hourmeter
Accessories on request	<ul style="list-style-type: none"> • Trolley: two-wheels and handles • Welding cables \varnothing 25 mm² (5+3 mt) with accessories
Noise level	<ul style="list-style-type: none"> • Lwa 99 (74 dB at 7 mt)
DC welding	<ul style="list-style-type: none"> • Current regulation: electromechanical • Duty Cycle @ 35%: 170A - 27V • Duty Cycle @ 40%: 180A - 20V • Duty Cycle @ 60%: 140A - 26V • Stepless control (CC mode): 40A - 170A • Open Circuit Voltage: 90V • Max welding rod: 4 mm
AC generator - 50Hz	<ul style="list-style-type: none"> • Type: asynchronous, self-excited and self-protected • Three-phase power (stand-by): 5kVA - 400V • Three-phase power (prime): 4,5kVA - 400V • Single-phase power (max.): 4kVA - 230V • Single-phase power (max.): 1,5kVA - 48V • Power Factor: $\cos \phi$ 0,8
Diesel Engine 3000 rpm	<ul style="list-style-type: none"> • Type: Yanmar L100V - STAGEV - 1 cyl. - 435 cm³ • Max power: 8,4 HP (6,3 kWm) • Starting system: electric (12Vdc) • Cooling system: air • Fuel tank capacity: 30 lt • Fuel consumption @ 75%: 1,5 lt/h
Other features	<ul style="list-style-type: none"> • Insulation Class: H • Ambient temperature: 40 °C (*) • Altitude: 1000 m (*) • Mechanical Protection: IP 23 • Dimensions (L x W x H): 950 x 480 x 574 mm • Dry weight: 148 kg

(*) - For altitude and temperature values higher than those listed above, please consult the manufacturer to verify the available power.
In line with our continued development, innovation and voice of customer program, we reserve the right to change data without notice.