

DF 7500 MPT



TECHNICAL SPECIFICATIONS	DF 7500 MPT
Electrical engine power (fan)	7,5 kW
Coverage (without wind)	30 - 40 m
Integrated generating set	17 kW - diesel engine - 1500 rpm
Fuel tank capacity	68 L
Water tank capacity	2000 L
Working pressure	7 - 12 bar
Water consumption (1 pump / 2 pumps)	23 L/min (7 bar) / 35 L/min (12 bar)
Running time (1 pump / 2 pumps)	85 min (7 bar) / 60 min (12 bar)
Water inlet filter	180 µm
Working angle	335°
Tilting	0 - 40°
Dimensions with tow bar and wheels (L x W x H)	4450 x 2240 x 2640 mm
Dry weight with tow bar and wheels	2450 kg



STANDARD EQUIPMENT

- 2000 litres water tank, 100% stainless steel
- 17 kW integrated generating set
- Complete with 4 wheels, tow bar and forklift pockets
- Automatic rotation system
- Integrated control panel
- 2 booster pumps with peripheral impellers
- Flowmeter for pump protection
- Pressure gauge for outlet pressure reading
- Stainless steel crown with nozzles
- Water drain system
- 4 height adjustable stabilizers
- Electric tilting
- Remote control to switch on/off the fan, the pump and the electrical rotation

OPTIONAL

- Low speed trailer (without brakes)
- Dosing pump for chemical additives
- Arctic kit
- 110V kit for the generating set
- Remote control for the generating set
- Double nozzles holder crown
- Dedicated colour (RAL) (for spray cannon only)
- Rigid adjustable drawbar with 76mm eyelet hitch (for low speed trailer only)

MAXIMUM VERTICAL AND HORIZONTAL RANGE

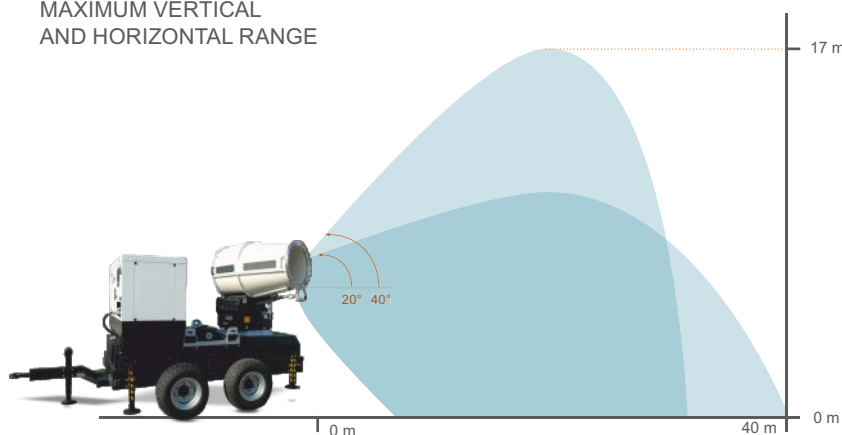

ROTATION ANGLE

