TECHNICAL SHEET

Semi electric pallet stacker

Semi-electric stacker entirely built in stainless steel AISI 304 suitable to work in the aggressive and corrosive environments where the cleaning and the hygiene are the most required values and where there is serious problem of corrosion related to the use of corrosive acids and saline solutions.

Extremely light and easy to handle, designed and manufactured to minimize the manual handling of the loads in agressive environments reducing the operator's efforts.

Optimal for use in the food, or chemical and pharmaceutical industry. Durable and ergonomic satisfies the strictest hygiene regulations to withstand regular high-pressure cleaning and disinfection.

Technical features

- · corrosion-proof chassis for aggressive and corrosive environments
- · ergonomic tiller arm, robust long-term durable structure
- built to withstand regular high-pressure cleaning and disinfection avoiding dirt deposits and the spread of germs and bacteria
- hygienic features and easy access to the components (lower cleaning and maintenance cost)
- · easy to handle, quick lifting
- maximum stability

Options package

- stainless steel AISI 316
- double load wheels
- · custom forks length less or over the standard dimension
- · custom forks width and/or external forks width













Model: Bada 10-SE


Code: UM.10SE.EN.REV.02 Edition: 10/2018 Language: english








Characteristics	1.1	Manufacturer			Italiana Carrelli Elevatori srl		
	1.2	Model			10-SE		
	1.3	Drive			Manual		
	1.4	Operator type			Pedestrian		
	1.5	Load capacity / rated load	Q	t	1		
	1.6	Load centre distance	С	mm	600		
	1.9	Wheelbase	У	mm	1.230		
Weights	2.1	Service weight incl. battery (see line 6.5)		kg	320	380	
	2.2	Weight on axle with load, front/rear		kg	370 / 950	400 / 980	
	2.3	Weight on axle without load, front/rear		kg	200 / 120	230 / 150	
Wheels Chassis	3.1	Tires			polyurethane		
	3.2	Tire size, front		mm	175x40		
	3.3	Tire size, rear		mm	82x90		
	3.5	Wheels, number front / rear (x = driven wheels)		n°	2/2		
	3.6	Track width, front	b10	mm	683		
	3.7	Track width, rear	b11	mm	380		
Basic Dimensions	4.2	Mast lowered height	h1	mm	2.078	1.978	
	4.4	Lift height	h3	mm	1.560	2.810	
	4.5	Mast extended height	h4	mm	2.078	3.340	
	4.9	Height of tiller arm in drive position min. / max.	h14	mm	724 / 1.223		
	4.15	Forks lowered height	h13	mm	90		
	4.19	Overall length	I1	mm	1.740		
	4.20	Length to face of forks	12	m	590		
	4.21	Overall width	b1/b2	mm	779		
	4.22	Forks dimensions	s/e/l	mm	55 / 180 / 1.150		
	4.25	Width over forks	b5	mm	560		
	4.33	Aisle width for pallets 1000 x 1200 crossways	Ast	mm	1.860		
	4.34	Aisle width for pallets 800 x 1200 lengthways	Ast	mm	1.890		
	4.35	Turning radius	Wa	mm	1.313		
Performances	5.2	Lifting speed with/without load		m/s	0,05 / 0,04		
	5.3	Lowering speed		m/s	0,19 / 0,13		
	5.11	Service brake			manual		
Electric Motors	6.2	Lift motor, rating S3 15%		kW	1,8		
	6.4	Battery voltage, nominal capacity K5		V/Ah	12 / 140		
	6.5	Battery weight		kg	36		
					*optional		

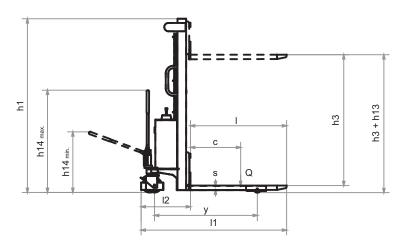



Italiana Carrelli Elevatori s.r.l.



via Albere 3/E, 36060 Romano d'Ezzelino (VI) Italy



+39.0424.382080



+39.0424.510432





