


MIRO[®]

OPERATING AND MAINTENANCE INSTRUCTION



LARIUS[®]
PAINT SPRAYING EQUIPMENT

ENGLISH



Due to a constant product improvement programme, the factory reserves the right to modify technical details mentioned in this manual without prior notice.

This manual is to be considered as an English language translation of the original manual in Italian. The manufacturer shall bear no responsibility for any damages or inconveniences that may arise due to the incorrect translation of the instructions contained within the original manual in Italian.



ELECTRIC DIAPHRAGM PUMP

INTRODUCTION	p.1	Cleaning the compression valve	p.15
WARNING	p.2	Replacing hydraulic oil	p.17
A WORKING PRINCIPLE	p.3	Cleaning the motor cooling fan guard	p.18
B TECHNICAL DATA.....	p.4	L WARNING PLATE	p.18
C DESCRIPTION OF THE EQUIPMENT	p.5	M PROBLEMS AND SOLUTIONS.....	p.19
D TRANSPORT AND UNPACKING	p.7	N CORRECT PROCEDURE OF DECOMPRESSION .	p.20
E SAFETY RULES.....	p.7	SPARE PARTS	
Electrical safety precautions	p.8	O COMPLETE HYDRAULIC BODY	p.22
F SETTING-UP.....	p.8	P COMPLETE COLOUR BODY.....	p.24
Connection of the flexible hose to the gun	p.8	Q VERTICAL SUCTION SYSTEM	p.25
Check on power supply	p.8	R HORIZONTAL SUCTION SYSTEM.....	p.26
Connection of the tooling to the power supply .	p.9	S HIGH PRESSURE GUN AT 250.....	p.27
Washing of the new equipment.....	p.9	T TROLLEY ASSEMBLY	p.28
Preparation of the paint.....	p.11	Wheeled carriage assembly.....	p.28
G WORKING	p.11	Fixed chassis assembly	p.28
Start of the painting operations	p.11	Petrol engine carriage	p.29
Spray adjustment	p.12	U COMPLETE PETROL ENGINE CASING.....	p.30
H CLEANING AT THE END WORK	p.13	V ACCESSORIES.....	p.32
I ROUTINE MAINTENANCE	p.15	Z VERSIONS	p.36
Top up hydraulic oil.....	p.15		
Release the suction valve.....	p.15		

WE ADVISE THE USE OF THIS EQUIPMENT ONLY BY PROFESSIONAL OPERATORS.
ONLY USE THIS MACHINE FOR USAGE SPECIFICALLY MENTIONED IN THIS MANUAL.

Thank you for choosing a **LARIUS S.R.L.** product.
As well as the product purchased,
you will receive a range of support services
enabling you to achieve the results desired,
quickly and professionally.

WARNINGS

The table below provides the meaning of the symbols used in this manual in relation to using, earthing, operating, maintaining, and repairing of this equipment.

	<p>Read this operator's manual carefully before using the equipment. An improper use of this machine can cause injuries to people or things. Do not use this machine when under the influence of drugs or alcohol. Do not modify the equipment under any circumstances. Use products and solvents that are compatible with the various parts of the equipment, and read the manufacturer's warnings carefully. See the Technical Details for the equipment given in the Manual. Check the equipment for worn parts once a day. If any worn parts are found, replace them using ONLY original spare parts. Keep children and animals away from work area. Comply with all safety standards.</p>
	<p>It indicates an accident risk or serious damage to equipment if this warning is not followed.</p>
	<p>It indicates a fire or explosion risk if this warning is not followed. Eliminate all ignition sources such as pilot lights, cigarettes, portable electric lamps and plastic drop cloths. Keep work area free of debris. ONLY use this equipment in a well ventilated area. EARTH ALL THE EQUIPMENT LOCATED IN THE WORK AREA. Do not form connections or switch light switches on or off if the air contains inflammable fumes. If electrical shocks or discharges are encountered the operation being carried out using the equipment must be stopped immediately. Keep a fire extinguisher at hand in the immediate vicinity of the work area.</p>
	<p>It indicates wound and finger squashing risk due to movable parts in the equipment. Tenersi lontano dalle parti in movimento. Do not use the equipment without the proper protection. Before any inspection or maintenance of the equipment, carry out the decompression procedure explained in this manual, and prevent any risk of the equipment starting unexpectedly.</p>
 	<p>Report any risk of chemical reaction or explosion if this warning has not been given. There is a risk of injury or serious lesion related to contact with the jet from the spray gun. If this should occur, IMMEDIATELY contact a doctor, indicating the type of product injected. Do not spray before the guard has been placed over the nozzle and the trigger on the spray gun. Do not put your fingers in the spray gun nozzle. Once work has been completed, before carrying out any maintenance, complete the decompression procedure explained in this manual.</p>
	<p>It indicates important recommendations about disposal and recycling process of products in accordance with the environmental regulations.</p>
	<p>Report any danger of electric shock if the warning and presence of live electrical parts has not been indicated. Store in a dry place and do not expose to the rain. Check that the cables are in good condition. Switch off the equipment and discharge any electricity before cleaning or maintaining the equipment.</p>
	<p>Mark any clamps attached to earth cables. Use ONLY 3-wire extension cords and grounded electrical outlets. Before starting work make sure that the electrical system is earthed and that it complies with safety standards.</p>
   	<p>It is obligatory to wear suitable clothing as gloves, goggles and face shield. Wear clothing that complies with the safety standards in force in the country in which the equipment is used. Do not wear bracelets, earrings, rings, chains, or anything else that may hinder the operator's work. Do not wear clothing with wide sleeves, scarves, ties, or any other piece of clothing that could get tangled up in moving parts of the equipment during the work, inspection, or maintenance cycles.</p>


A WORKING PRINCIPLE

The **LARIUS MIRO'** unit is defined as an "electric diaphragm pump". An electric diaphragm pump is used for high pressure paint spraying without air (*known as "airless"*). The pump is powered by an electric (*internal combustion*) motor coupled with a cam shaft. The shaft acts on the hydraulic piston as it pumps oil from the hydraulic case and sends the suction diaphragm into fibrillation. When the diaphragm moves, it creates a vacuum.

The product is sucked up, pushed towards the pump outlet and sent to the guns through the flexible hose . A hydraulic valve on the hydraulic case head allows setting and checking the pressure of the paint product at the pump outlet. A second hydraulic safety valve to avoid over-pressure, ensures total equipment reliability. The hydraulic box allows to convert the vertical gravity hopper version (**A1**) to horizontal suction version (**A2**).



MIRO' Vertical suction

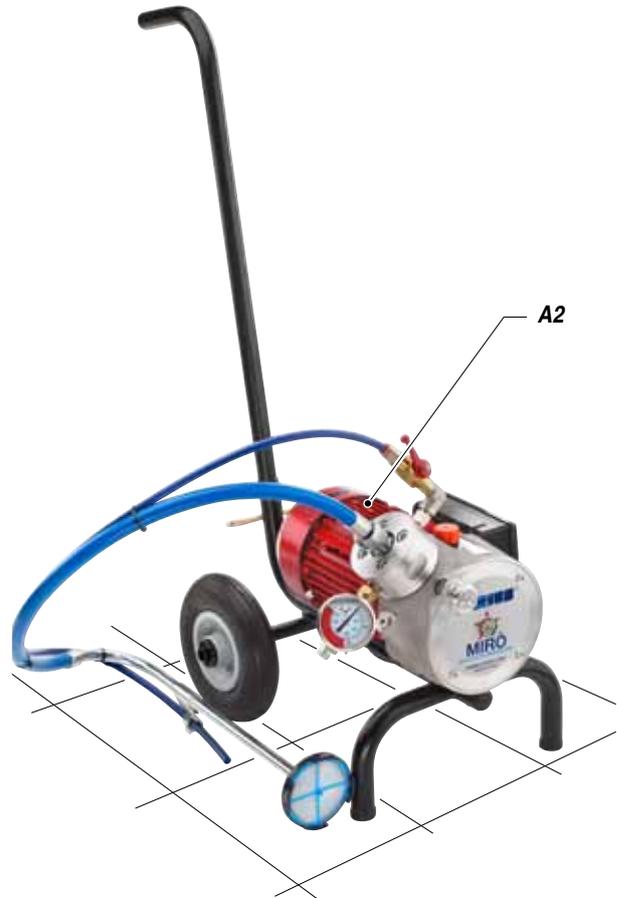

MIRO' Horizontal suction


Fields of application	Application materials	
Indoor	Lacquer	Paints
Outdoor	Waterborne	Emulsions
Industrial buildings	Acrylic	Fillers
Industrial constructions	Primers	Rust preventer
Redeveloping	Enamels	Primer
Roofing	Fixative	

B TECHNICAL DATA

	MIRÒ on trolley	MIRÒ on frame
SUPPLY (single-phase, Three-phase internal combustion supply, petrol-diesel)*	230V 50Hz	230V 50Hz
MOTOR POWER Mono-threephase Internal combustion	0,75 kW	0,75 kW
MAX. WORKING PRESSURE	220 bar	220 bar
MAX. DELIVERY	2,2 L/min	2,2 L/min
WEIGHT	23 Kg	20 Kg
LENGTH	(A) 400 mm	(A) 440 mm
WIDTH	(B) 400 mm	(B) 400 mm
HEIGHT	(C) 900 mm	(C) 500 mm

*Available on request with special voltages

PARTS OF THE PUMP IN CONTACT WITH THE MATERIAL Stainless Steel AISI 420B, Teflon, Aluminium.

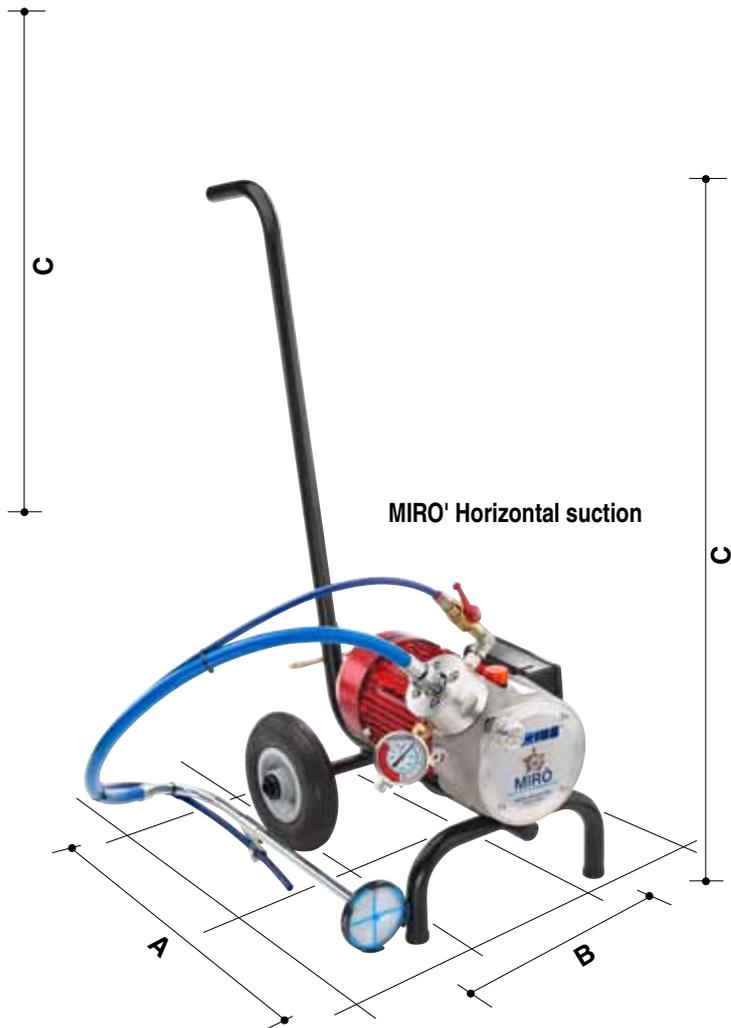

C DESCRIPTION OF THE EQUIPMENT

MIRO' HORIZONTAL SUCTION



POS.	Description
1	Carriage
2	Electric / combustion motor
3	High pressure manometer
4	Setting valve
5	Hydraulic oil filling cap
6	Hydraulic body

POS.	Description
7	Colour body
8	Suction tube
9	Recirculation tube
10	LARIUS AT 250 gun
11	High pressure feed tube
12	Circulation tap

MIRO' VERTICAL SUCTION

English



POS.	Description
1	Electric / combustion motor
2	High pressure manometer
3	Setting valve
4	Hydraulic oil filling cap
5	Hydraulic body
6	Colour body

POS.	Description
7	Tank
8	Circulation tap
9	Recirculation tube
10	Feed tube connection
11	Feed tube
12	LARIUS AT 250 gun

D TRANSPORT AND UNPACKING

- The packed parts should be handled as indicated in the symbols and markings on the outside of the packing.
- Before installing the equipment, ensure that the area to be used is large enough for such purposes, is properly lit and has a clean, smooth floor surface.

	The user is responsible for the operations of unloading and handling and should use the maximum care so as not to damage the individual parts or injure anyone.
	To perform the unloading operation, use only qualified and trained personnel (truck and crane operators, etc.) and also suitable hoisting equipment for the weight of the installation or its parts.
	Follow carefully all the safety rules.
	The personnel must be equipped with the necessary safety clothing.

- The manufacturer will not be responsible for the unloading operations and transport to the workplace of the machine.
- Check the packing is undamaged on receipt of the equipment. Unpack the machine and verify if there has been any damage due to transportation. In case of damage, call immediately **LARIUS** and the Shipping Agent. All the notices about possible damage or anomalies must arrive timely within 8 days at least from the date of receipt of the plant through Registered Letter to the Shipping Agent and to **LARIUS**.

	The disposal of packaging materials is a customer's competence and must be performed in accordance with the regulations in force in the country where the plant is installed and used. It is nevertheless sound practice to recycle packaging materials in an environment-friendly manner as much as possible.
---	--

E SAFETY RULES

- THE EMPLOYER SHALL TRAIN ITS EMPLOYEES ABOUT ALL THOSE RISKS STEMMING FROM ACCIDENTS, ABOUT THE USE OF SAFETY DEVICES FOR THEIR OWN SAFETY AND ABOUT THE GENERAL RULES FOR ACCIDENT PREVENTION IN COMPLIANCE WITH INTERNATIONAL REGULATIONS AND WITH THE LAWS OF THE COUNTRY WHERE THE PLANT IS USED.

- THE BEHAVIOUR OF THE EMPLOYEES SHALL STRICTLY COMPLY WITH THE ACCIDENT PREVENTION AND ALSO ENVIRONMENTAL REGULATIONS IN FORCE IN THE COUNTRY WHERE THE PLANT IS INSTALLED AND USED.



Read carefully and entirely the following instructions before using the product. Please save these instructions in a safe place.



The unauthorised tampering/replacement of one or more parts composing the machine, the use of accessories, tools, expendable materials other than those recommended by the manufacturer can be a danger of accident.



The manufacturer will be relieved from tort and criminal liability.

- KEEP YOUR WORK PLACE CLEAN AND TIDY. DISORDER WHERE YOU ARE WORKING CREATES A POTENTIAL RISK OF ACCIDENTS.
- ALWAYS KEEP PROPER BALANCE AVOIDING UNUSUAL STANCE.
- BEFORE USING THE TOOL, ENSURE THERE ARE NOT DAMAGED PARTS AND THE MACHINE CAN WORK PROPERLY.
- ALWAYS FOLLOW THE INSTRUCTIONS ABOUT SAFETY AND THE REGULATIONS IN FORCE.
- KEEP THOSE WHO ARE NOT RESPONSIBLE FOR THE EQUIPMENT OUT OF THE WORK AREA.
- **NEVER** EXCEED THE MAXIMUM WORKING PRESSURE INDICATED.
- **NEVER** POINT THE SPRAY GUN AT YOURSELVES OR AT OTHER PEOPLE. THE CONTACT WITH THE CASTING CAN CAUSE SERIOUS INJURIES.
- IN CASE OF INJURIES CAUSED BY THE GUN CASTING, SEEK IMMEDIATE MEDICAL ADVICE SPECIFYING THE TYPE OF THE PRODUCT INJECTED. **NEVER** UNDERVALUE A WOUND CAUSED BY THE INJECTION OF A FLUID.
- ALWAYS STOP ENGINE AND RELEASE THE PRESSURE IN THE CIRCUIT BEFORE PERFORMING ANY CHECK OR PART REPLACEMENT OF THE EQUIPMENT.
- NEVER MODIFY ANY PART IN THE EQUIPMENT. CHECK REGULARLY THE COMPONENTS OF THE SYSTEM. REPLACE THE PARTS DAMAGED OR WORN.

- TIGHTEN AND CHECK ALL THE FITTINGS FOR CONNECTION BETWEEN PUMP, FLEXIBLE HOSE AND SPRAY GUN BEFORE USING THE EQUIPMENT.
- ALWAYS USE THE FLEXIBLE HOSE SUPPLIED WITH STANDARD KIT. THE USE OF ANY ACCESSORIES OR TOOLING OTHER THAN THOSE RECOMMENDED IN THIS MANUAL, MAY CAUSE DAMAGE OR INJURE THE OPERATOR.
- THE FLUID CONTAINED IN THE FLEXIBLE HOSE CAN BE VERY DANGEROUS. HANDLE THE FLEXIBLE HOSE CAREFULLY. DO NOT PULL THE FLEXIBLE HOSE TO MOVE THE EQUIPMENT. NEVER USE A DAMAGED OR A REPAIRED FLEXIBLE HOSE.



The high speed of travel of the product in the hose can create static electricity through discharges and sparks. It is suggested to earth the equipment. The pump is earthed through the earth cable of the supply. The gun is earthed through the high pressure flexible hose. All the conductors near the work area must be earthed.

- NEVER SPRAY OVER FLAMMABLE PRODUCTS OR SOLVENTS IN CLOSED PLACES.
- NEVER USE THE TOOLING IN PRESENCE OF POTENTIALLY EXPLOSIVE GAS.



Always check the product is compatible with the materials composing the equipment (*pump, spray gun, flexible hose and accessories*) with which it can come into contact. Never use paints or solvents containing Halogen Hydrocarbons (as the *Methylene Chloride*). If these products come into contact with aluminium parts can provoke dangerous chemical reactions with risk of corrosion and explosion.



IF THE PRODUCT TO BE USED IS TOXIC, AVOID INHALATION AND CONTACT BY USING PROTECTION GLOVES, GOGGLES AND PROPER FACE SHIELDS.



TAKE PROPER SAFETY MEASURES FOR THE PROTECTION OF HEARING IN CASE OF WORK NEAR THE PLANT.

Electrical safety precautions

- Check the "ON/OFF" switch is on the "OFF" position before connecting the cable to the mains.
- Never carry a plugged-in equipment.
- Disconnect the equipment before storing it and before performing any maintenance operation or replacing of accessories.
- Do not carry the equipment neither unplug it by pulling the electric cable.
Protect the cable from heat, oil and sharp edges.
- When the tool is used outdoors, use only an extension cable suited for outdoor use and so marked.



Never attempt to tamper with the calibre of instruments.

- Take care when the pumping rod is moving. Stop the machine whenever someone is within its vicinity.
- Repairs of the electrical equipment should only be carried out by skilled personnel, otherwise considerable danger to the user may result.

F SETTING-UP


CONNECTION OF THE FLEXIBLE HOSE TO THE GUN

- Connect the high pressure flexible hose to the pump and to the gun, ensuring to tighten the fittings (*the use of two wrenches is suggested*).
NEVER use sealants on fittings' threads.
- It is recommended to use the hose provided with the standard kit (*ref. 35017*).
NEVER use a damaged or a repaired flexible hose.

CHECK ON POWER SUPPLY



Make sure that the electrical system is earthed and complies with regulations.

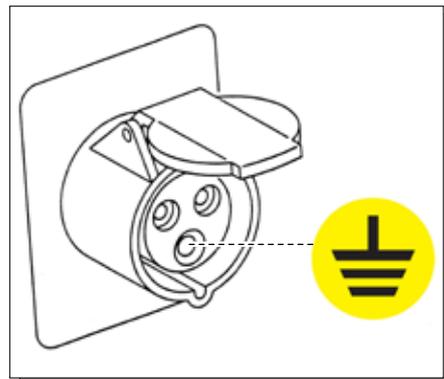

- Check the mains voltage corresponds to the equipment's rating (F1).



F1

- The supply cable (F2) is provided without plug. Use a plug which guarantees the plant earthing. Only a technician or a skilled person should perform the connection of the plug to the electric cable.




F2



Should anyone use an extension cable between the tooling and the socket, it must have the same characteristics as the cable supplied (*minimum diameter of the wire 2.5 mm²*) with a maximum length of 50 mt. Higher lengths and lower diameters can provoke excessive voltage falls and also an anomalous working of the equipment.

CONNECTION OF THE TOOLING TO THE POWER SUPPLY

- Check the ON/OFF switch (F3) is on the "OFF" position (0) before connecting the cable to the mains.

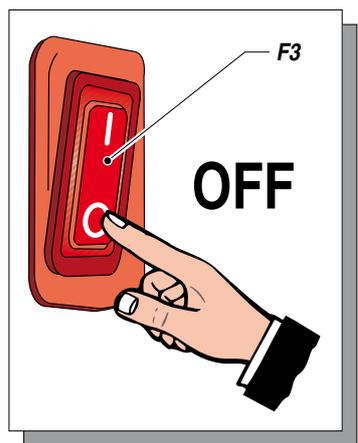

F3

OFF



F3

- Place the pressure control knob (F4) on the "MIN" position (turn counterclockwise).




F4


WASHING OF THE NEW EQUIPMENT

- The equipment has already been adjusted at our factory with light mineral oil left inside the pumping group as protection. Therefore, wash with diluent before sucking the product.


- Lift the suction pipe and dip it into the solvent tank (F5).

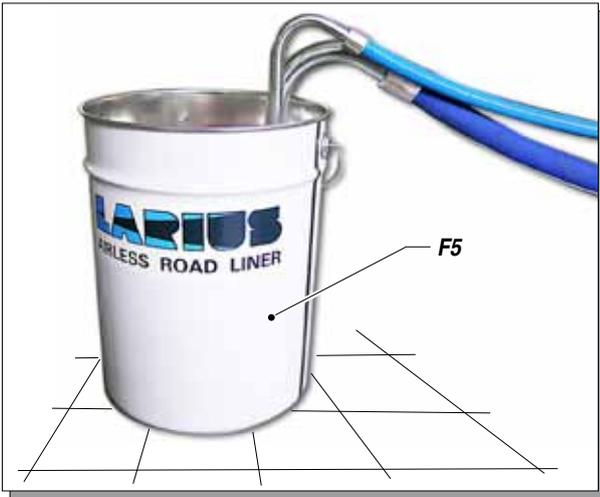



- Ensure the gun (F6) is without nozzle.

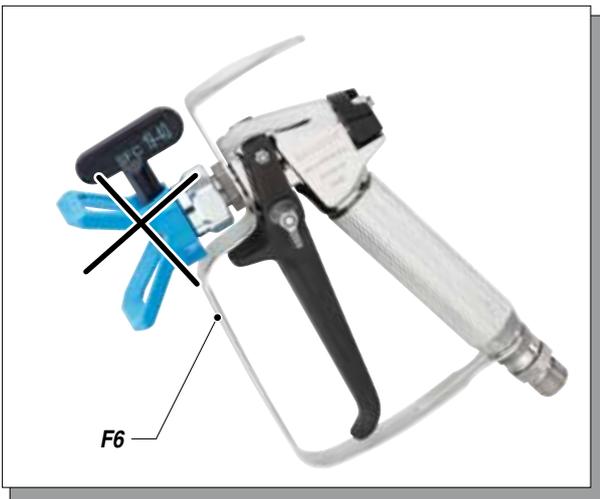

- Open the re-circulation tap (F7).

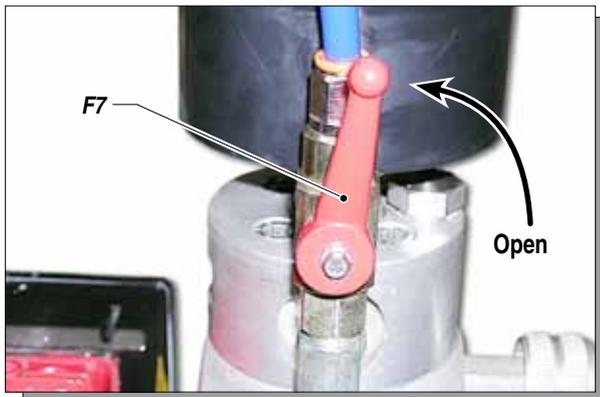


- Turn the unit ON-OFF switch (F3) on the "ON" position (I).

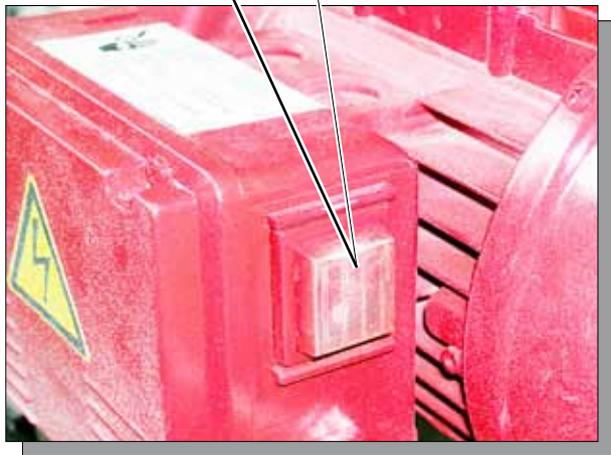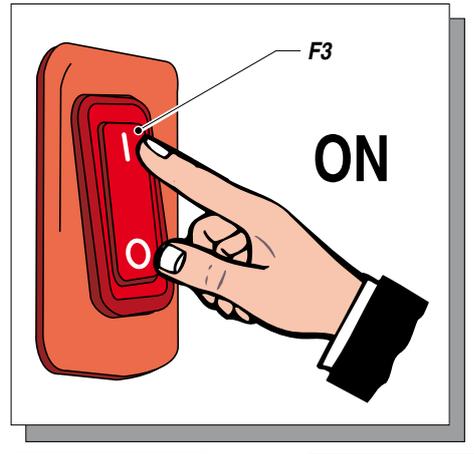


- Rotate the pressure setting knob (F4) slightly clockwise so that the machine operates at minimum power.



- Point the gun at a container (F8) keeping the trigger pressed (so as to drain the oil inside) till a clean solvent comes out. Now, release the trigger.

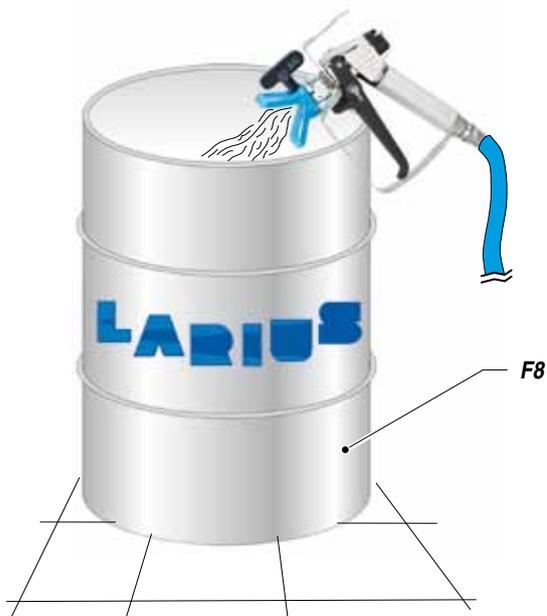

- Remove the suction pipe and take away the solvent tank.
- Point the gun at the solvent tank and press the trigger so as to recover the residual solvent.
- As the pump idles, press the ON/OFF switch (F3) on the position "OFF" (0) to stop the tooling.

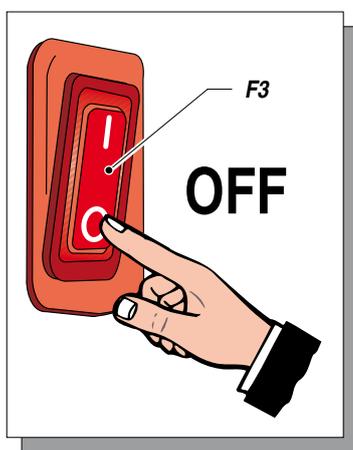

Absolutely avoid to spray solvents indoors. In addition, it is recommended to keep away from the pump in order to avoid the contact between the solvent fumes and the electric motor.

- Now the machine is ready. Should you use water paints, besides the solvent wash, a wash with soapy and then clean water is suggested.

- Insert the gun trigger lock and assemble the nozzle.

PREPARATION OF THE PAINT

- Make sure the product is suitable to be used with a spray gun.
- Mix and filter the product before using it. For filtration, use **CLOSE-MESH** (ref.214) and **LARGE-MESH** (ref.215) LARIUS METEX braids.




Make sure the product to be used is compatible with the materials employed for manufacturing the equipment (stainless steel and aluminium). Because of that, please contact the supplier of the product.

Never use products containing halogen hydrocarbons (as *methylene chloride*). If these products come into contact with aluminium parts of the equipment, can provoke dangerous chemical reactions with risk of explosion.





G WORKING

START OF THE PAINTING OPERATIONS

- Use the tooling after performing all the **SETTING UP** operations above described.
- Dip the suction pipe (G1) into the product tank.

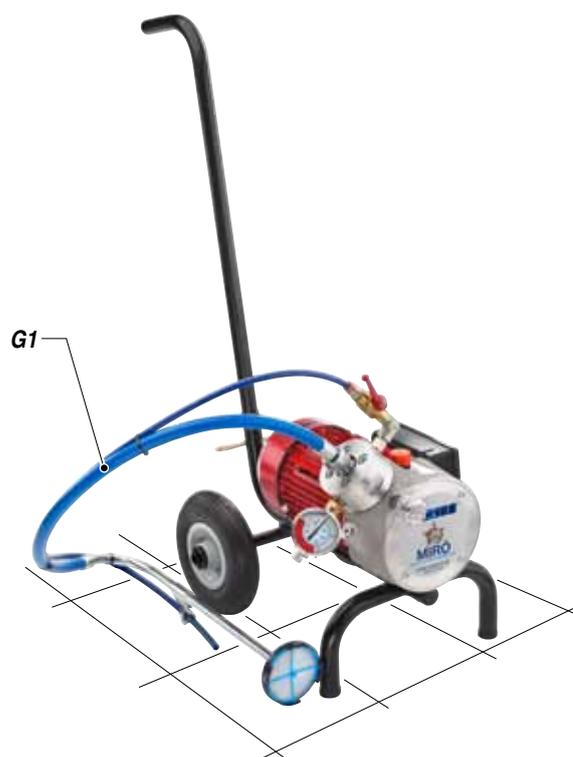

- Open the re-circulation tap (G2).
- Press the **ON/OFF** switch of the equipment and turn a little the pressure control knob (G3) clockwise, so as the machine works at the idle speed.
- Make sure the product recycles from the return tube (G4).
- Close the re-circulation tap (G2).

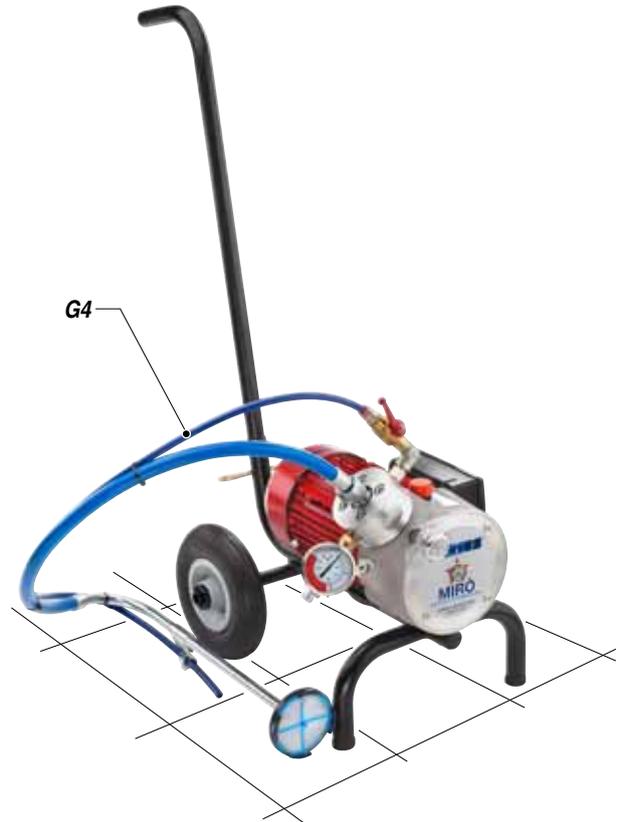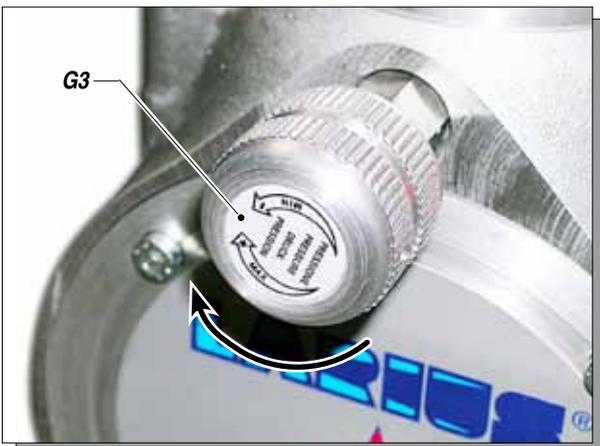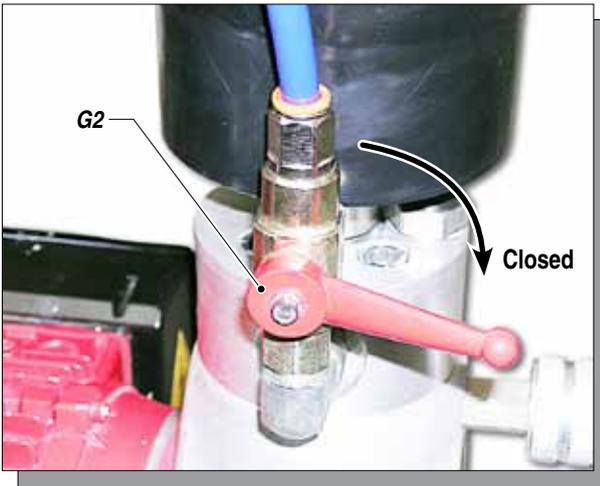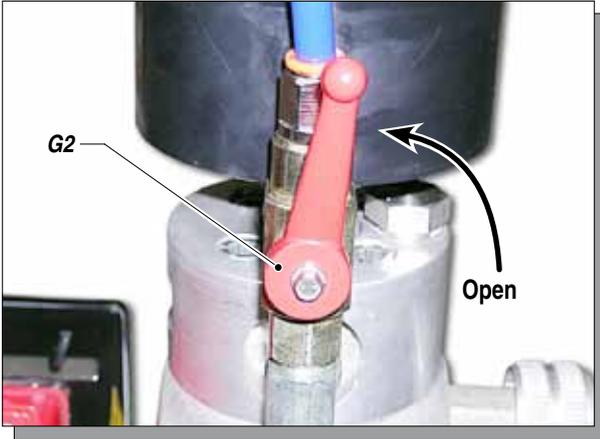

- At this point the machine will continue to suck the paint product until the delivery hose is completely full. Afterwards, the product will re-circulate automatically.

SPRAY ADJUSTMENT

- Slowly turn clockwise the pressure control knob to reach the pressure value in order to ensure a good atomization of the product.
- An irregular and marked spray on the sides indicates a low working pressure. On the contrary, a too high pressure causes a high fog ("overspray") and waste of product..
- In order to avoid overthickness of paint, let the gun advance sideways (*right-left*) when spraying.
- Always paint with regular parallel bands coats.
- Keep a safety and constant distance between the gun and the support to be painted and also keep yourselves perpendicular to it.





NEVER point the spray gun at yourselves or at other people. The contact with the casting can use serious injuries. In case of injuries caused by the gun casting, seek immediate medical advice specifying the type of the product injected.

H CLEANING AT THE END WORK


- Reduce pressure to the minimum (turn counterclockwise the pressure control knob (H1)).



- Press the ON/OFF switch (H2) placed on the box of the electric motor, to stop the equipment.

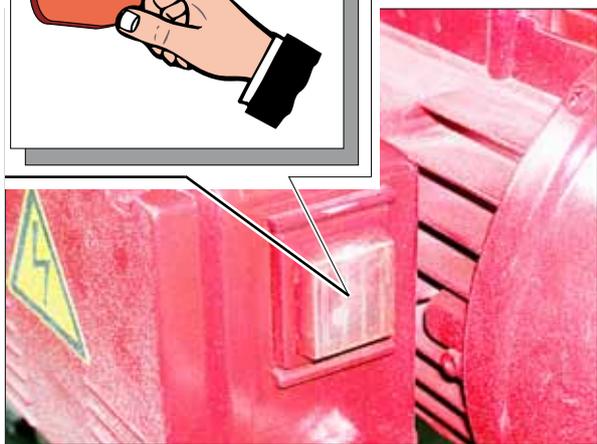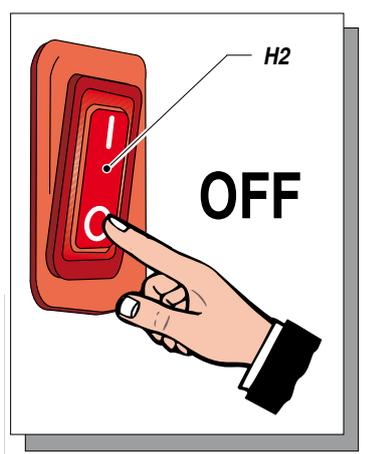


- First release the residual pressure from the gun by holding it pointed down towards the paint container, then open the re-circulation tap (H3).

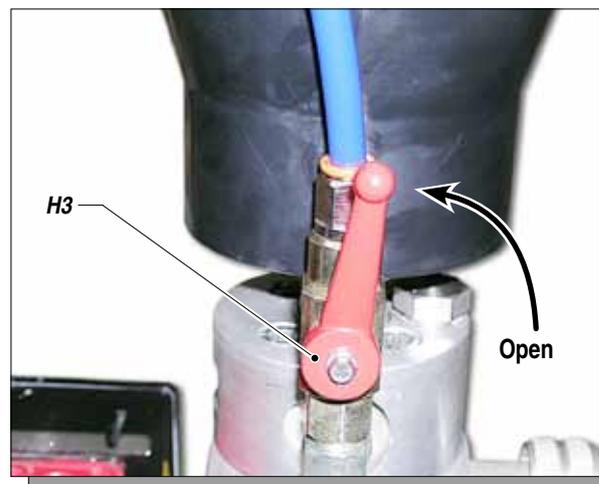


For the horizontal version, lift the suction hose and replace the bucket containing the product with a bucket of solvent (make sure it is compatible with the product you are using).


- Unscrew the gun nozzle (do not forget to clean it with solvent).
- Turn the ON-OFF switch (H2) on the ON position and rotate the pressure setting knob (H1) slightly clockwise.
- Make sure the solvent recycles the washing fluid from the return tube (H4).

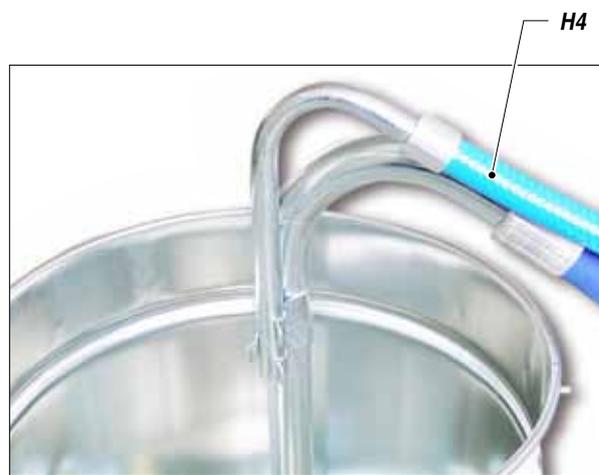

Close the re-circulation tap (H3) .

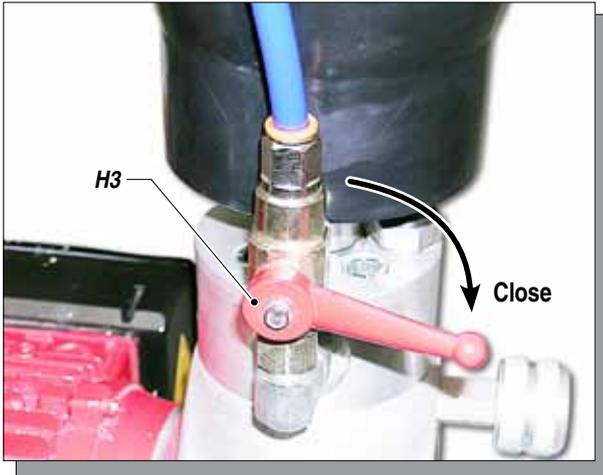


- Point the gun (H5) at the product tank (H6) and, keeping the trigger pressed, release the remaining product till a clean solvent comes out. Now, release the trigger.

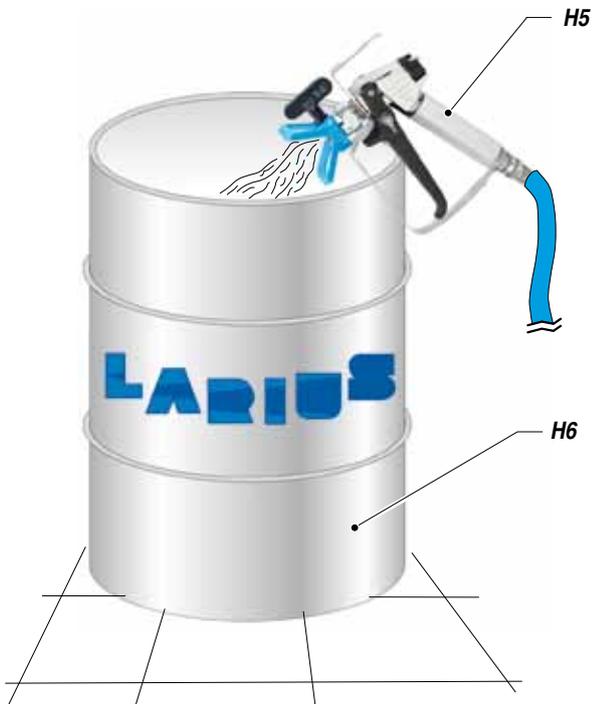

- Lift again the suction pipe and remove the solvent tank.

- Now point the gun at the solvent tank and press the trigger so as to recover the residual solvent.
- As the pump starts idling, press the ON/OFF switch (H2) su OFF (0) to stop the equipment.

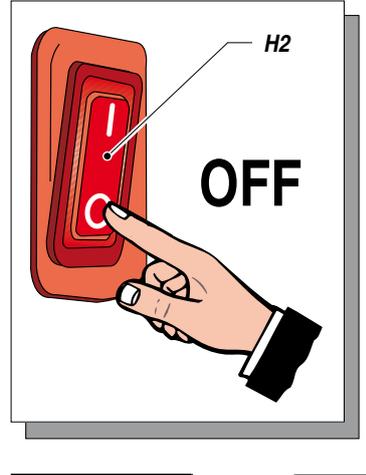

- In case of long storage, we recommend you to suck and to leave light mineral oil inside the pumping group and the flexible hose.

 **Follow the washing procedure before using again the equipment.**

I ROUTINE MAINTENANCE

TOP UP HYDRAULIC OIL

With each start up, check the hydraulic oil level by looking through the gauge (11) on the side of the hydraulic body. If necessary, use "AGIP OSO 46 type hydraulic oil" to top up the level.




RELEASE THE SUCTION VALVE

If the pump malfunctions, release the suction valve fitted on the head of the pump in the following way:

- Remove the suction hose fitting (*Mirò horizontal version*) or the suction tank (*Mirò vertical version*) and release the valve by inserting a rigid rod (12) with a diameter of no more than 15 mm.




To facilitate this operation add a few drops of oil.

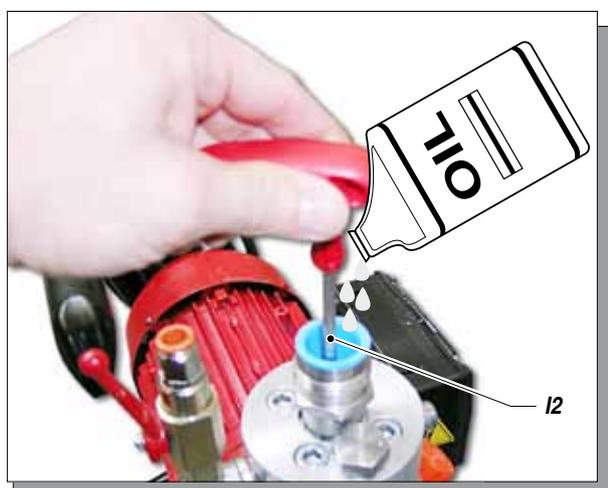


CLEANING THE COMPRESSION VALVE

If the machine has problems with sucking up the liquid, disassemble the compression valve (13), and clean it with solvents that are specifically for the type of paint being used.

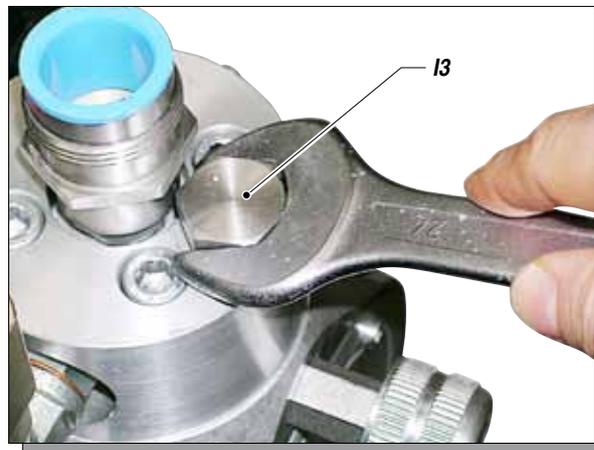


Once it has been cleaned, shake the valve (13) by hand to check that the ball inside moves freely in its seating. If necessary, clean again.

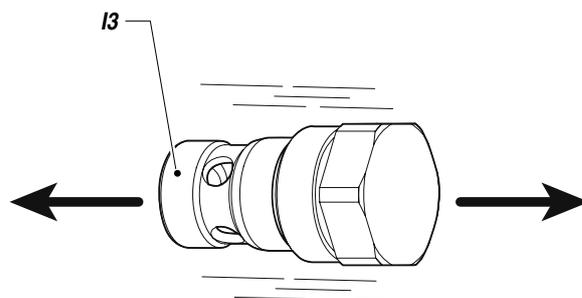


Check that the ball seals in its seating as follows:

- Turn the valve (I3) upside down;

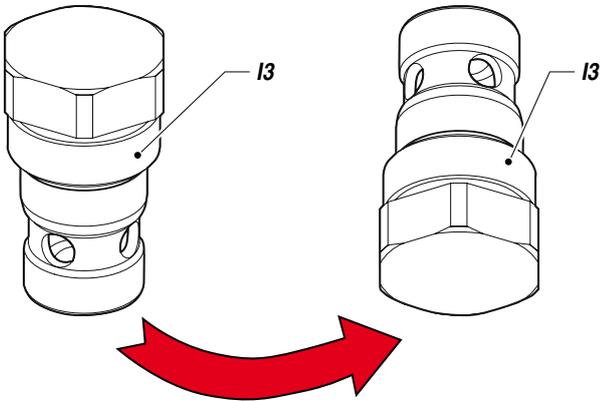

- Put solvent into the groove in the ball's seating;

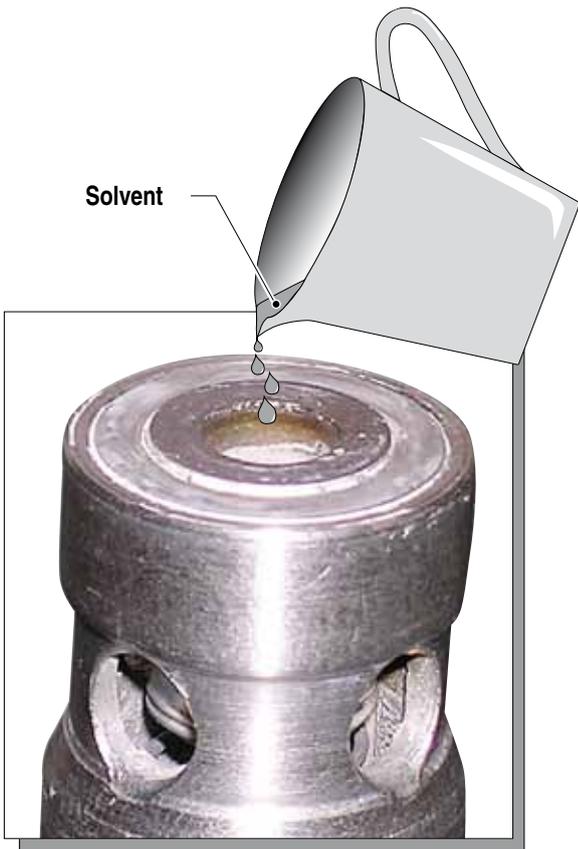

- If the quantity of solvent a few minutes later is still identical to that added previously, the ball's seal in its seating is ensured;

OK




- If the solvent flows out the holes at the bottom within a few minutes, replace this valve with a new one;

NO

REPLACE THE VALVE

Solvent

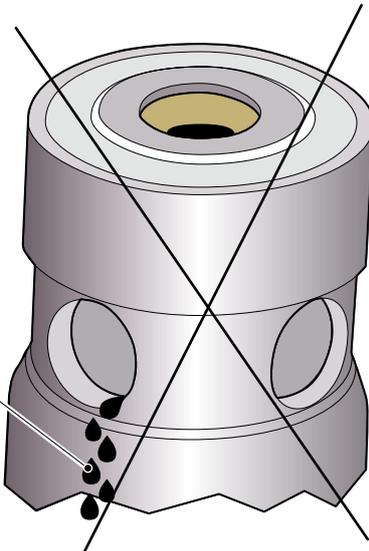

- Once the valve (I3) is properly clean, fit it again.





REPLACING HYDRAULIC OIL

After operating for 100 hours, replace the oil in the pump;

- Discharge the waste oil through the **plug (14)** fitted at the bottom of the pump casing.
- Clean the seals on the cap and replace it if worn.
- Remove and clean the filter (15) on the side of the pump casing; if necessary, replace the filter and the respective seals.
- Clean and, if necessary, replace the worn seals (15).
- Replace the plug (14).
- Fill the pump with the recommended oil until it reaches the maximum level.
- Then, substitute the oil every 250 hours.



15

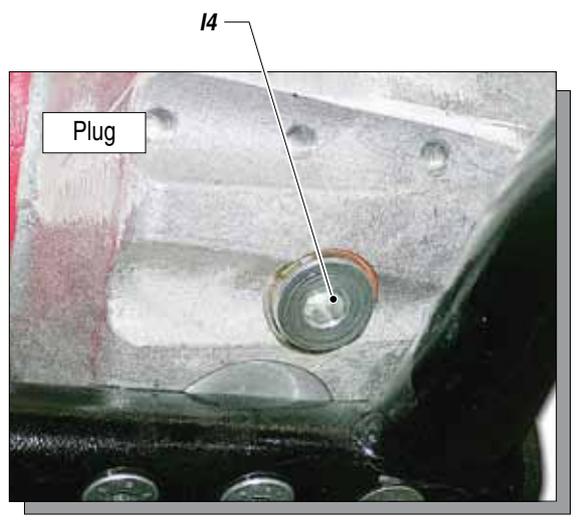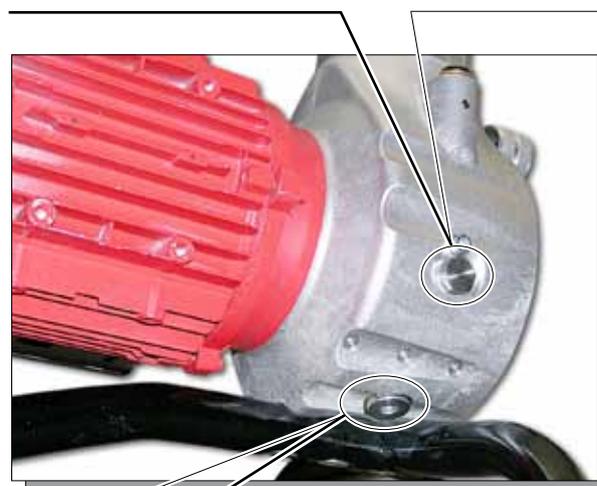


14



CLEANING THE MOTOR COOLING FAN GUARD

Clean the motor cooling fan protection guard (16) and the finned motor casing periodically to ensure the maximum cooling.

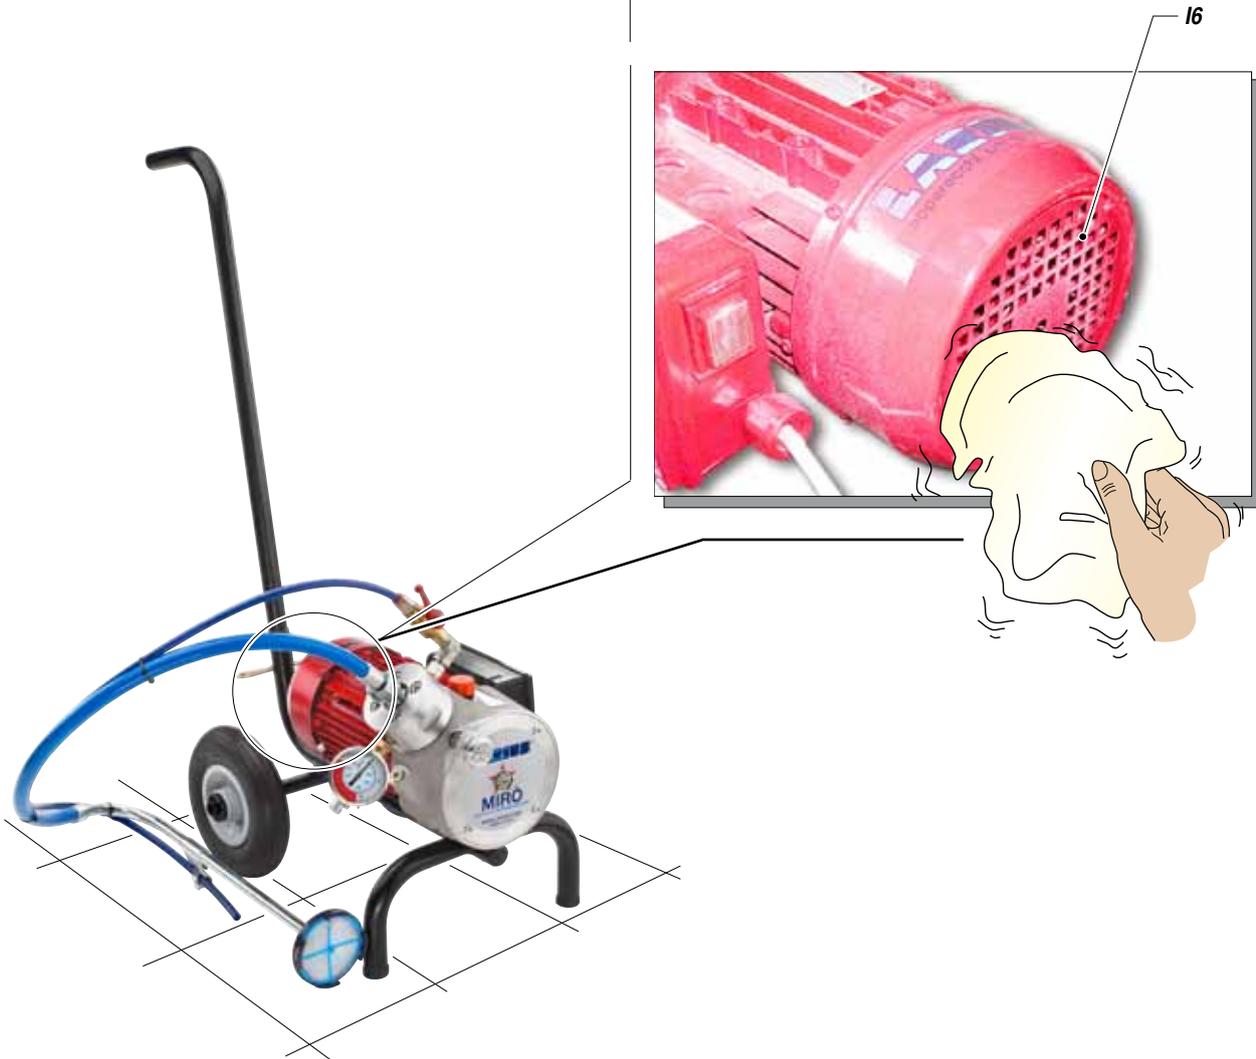

L WARNING PLATE

<p>LARIUS[®] Apparecchi per verniciatura</p>	<p>LARIUS[®] Paint spraying units</p>
 <p>ATTENZIONE</p> <p>UTILIZZARE GRUPPI ELETTOGENI CON ALTERNATORE ASINCRONO</p> <p>http://www.larius.com</p>	 <p>WARNING</p> <p>USE POWER UNITS WITH ASYNCHRONOUS ALTERNATOR</p> <p>e-mail larius@larius.com</p>

M PROBLEMS AND SOLUTIONS


Problem	Cause	Solution
<ul style="list-style-type: none"> The equipment does not start 	<ul style="list-style-type: none"> Lack of voltage; Considerable drops in mains voltage; ON-OFF switch disconnected; Breakdown of motor electric control box; The product is solidified inside the pump; 	<ul style="list-style-type: none"> Check the correct connection to the power supply; Check the extension cable; Ensure the ON-OFF switch is on the "ON" position and turn clockwise the pressure control knob; Verify and replace it, if necessary; Open the drain valve to release pressure in the circuit and stop the machine. Remove the compression valve and clean it;
<ul style="list-style-type: none"> The equipment does not suck the product 	<ul style="list-style-type: none"> Suction filter clogged; Suction filter too fine; The equipment sucks air; 	<ul style="list-style-type: none"> Clean or replace it; Replace it with a larger-mesh filter (<i>with very dense products, remove the filter</i>); Check the suction pipe;
<ul style="list-style-type: none"> The equipment suck but does not reach the pressure desired 	<ul style="list-style-type: none"> Lack of product; The equipment sucks air; The drain valve is open; Suction or delivery valve dirty; 	<ul style="list-style-type: none"> Add the product; Check the suction pipe; Close the drain valve; Disassemble the colour body group;
<ul style="list-style-type: none"> When pressing the trigger, the pressure lowers considerably 	<ul style="list-style-type: none"> Nozzle too big or worn; The product is too dense; The filter of the gun-butt is too fine; 	<ul style="list-style-type: none"> Replace it with a smaller one; Dilute the product, if possible; Replace it with a larger-mesh filter;
<ul style="list-style-type: none"> The pressure is normal but the product is not atomized. Leakage from the seal-tightening screw 	<ul style="list-style-type: none"> The nozzle is partially clogged; The product is too dense; The filter of the gun-butt is too fine; 	<ul style="list-style-type: none"> Clean or replace it; Dilute the product, if possible; Replace it with a larger-mesh filter;
<ul style="list-style-type: none"> The atomization is imperfect 	<ul style="list-style-type: none"> The nozzle is worn; 	<ul style="list-style-type: none"> Replace it;




Always close the air compressed supply and unload the plant pressure before performing any check or replacement of pump parts (see "correct procedure of decompression").

N CORRECT PROCEDURE OF DECOMPRESSION

- Insert the gun clamp (N1).

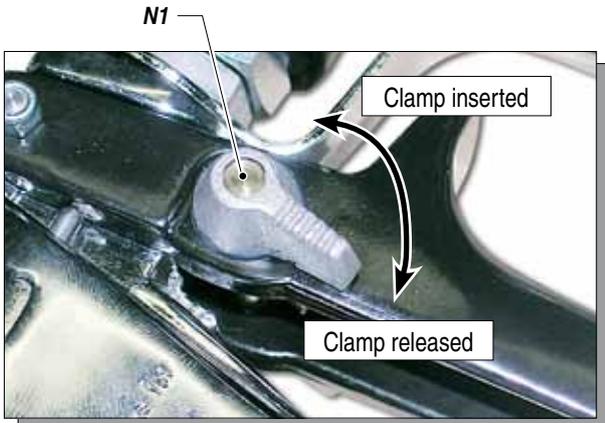


- Move the ON/OFF switch (N2) to the OFF position (0) to stop the equipment.

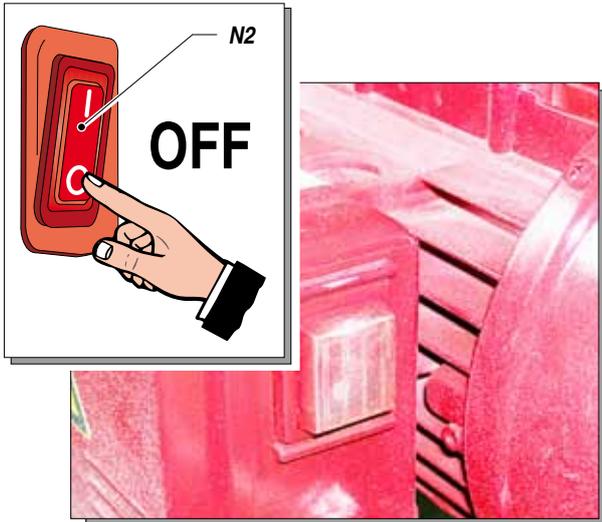


- Set the valve (N3) at its minimum pressure setting (turn anticlockwise).



- Disconnect the power supply cable (N4).

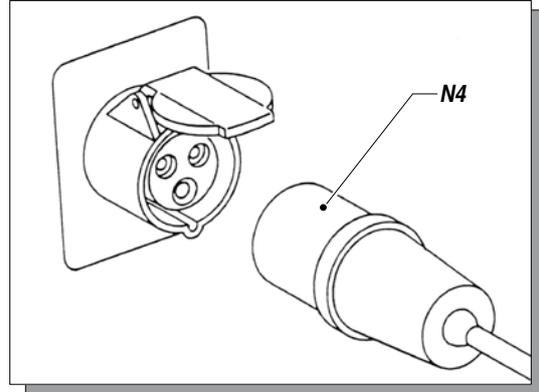

- Release the gun clamp (N1). Point the gun at the tank of the product and press the trigger to release pressure. At the end of the operation, insert the gun clamp.
- Open the re-circulation tap (N5) to release residual pressure.

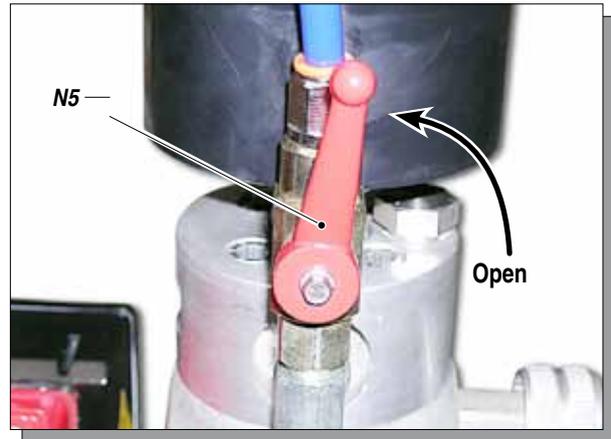

WARNING :

If the equipment is still under pressure after performing the operations above described because of the nozzle or the flexible hose clogged, proceed as follows:

- Loosen very slowly the gun nozzle.
- Release the clamp.
- Point the gun at the container of the product and press the trigger to release pressure.
- Loosen very slowly the fitting of connection from the flexible hose to the gun.
- Clean or replace the flexible hose and the nozzle.



SPARE PARTS

T Trolley assembly
pages 28-29

O Complete hydraulic body
page 22

Q Vertical suction system
page 25

S High pressure gun "AT 250"
page 27




P Complete colour body
page 24

R Horizontal suction system
page 26

U Complete petrol engine casing
page 30


0 COMPLETE HYDRAULIC BODY

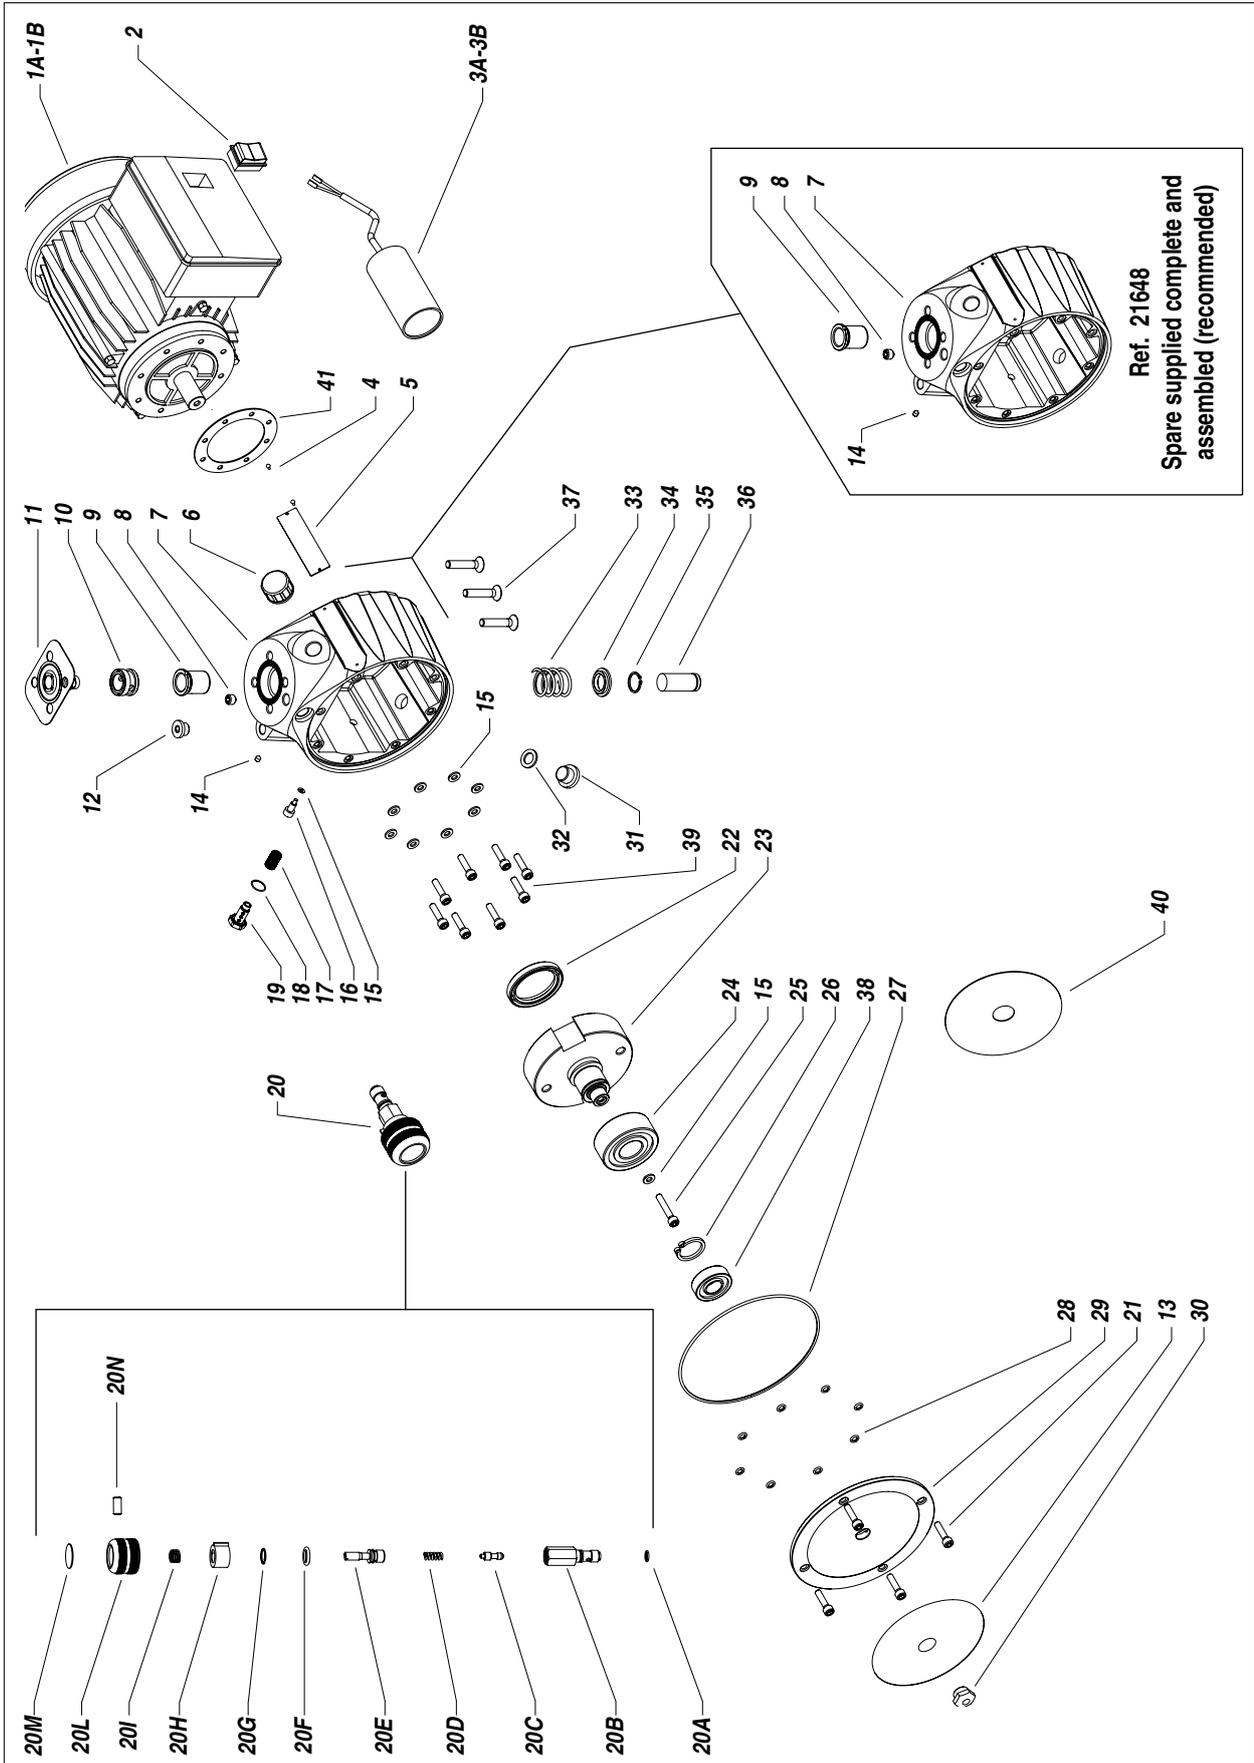

Pos.	Code	Description	Q.ty	Pos.	Code	Description	Q.ty
1A	21520	Electric motor 240V-50Hz	1	20F	32015/2	Elastic ring	1
1B	21521	Electric motor 120V-60Hz	1	20G	32015/3	OR	1
2	51006	Switch	1	20H	32016	Setting catch	1
3A	21522	Condenser 440V - 16µf	1	20I	32017/2	Spring	1
3B	21523	Condenser 440V - 32µf	1	20L	32017/1	Knob	1
4	34020	Rivet	2	20M	16308	Pressure plate	1
5	21524	Technical Data 120V-60Hz	1	20N	32017/1C	Dowel	1
5	21525	Technical Data 240V-50Hz	1	21	54004	Screw	4
6	32108	Plug	1	22	18909	Corteco	1
7*	21526	Hydraulic body	1	23	21538	Handwheel assembly	1
8*	21588	Dowel	1	24	21540	Bearing	1
9*	52015	Cylinder liner	1	25	21556	Screw	1
10	52016	Membrane Spacer	1	26	21541	Elastic ring	1
11	53002	Membrane Assembly	1	27	21542	OR	1
12	8083	Plug	1	28	301013	OR	8
13	21546	Front sticker	1	29	21543	Front cap	1
14*	21071	Dowel	1	30	32007	Oil inspection window	1
15	21537	Seal washer	10	31	32108	Oil cap	1
16	21552	Stop Bolt	1	32	33010	Gascket	1
17	258	Filter sieve 60 MESH	1	33	52014	Return spring	1
18	95326	ORM	1	34	52013	Stop ring	1
19	21532	Filter bolt	1	35	52012	Elastic ring	1
20	21533	Complete pressure regulation valve	1	36	21544	Hydraulic piston	1
20A	32014	OR	1	37	69014	Screws	3
20B	21534	Valve casing assembly	1	38	21559	Roller bearing	1
20C	21535	Pin assembly	1	39	91062	Screw	8
20D	32153	Pin spring	1	40	21546	Label Mirò	1
20E	32151	Adjustment screw	1	41	21531	Seal motor 1,5 mm	1


Pos. 7-8-9-14 recommended complete spare - Ref. 21648
To be bought already assembled

P COMPLETE COLOUR BODY

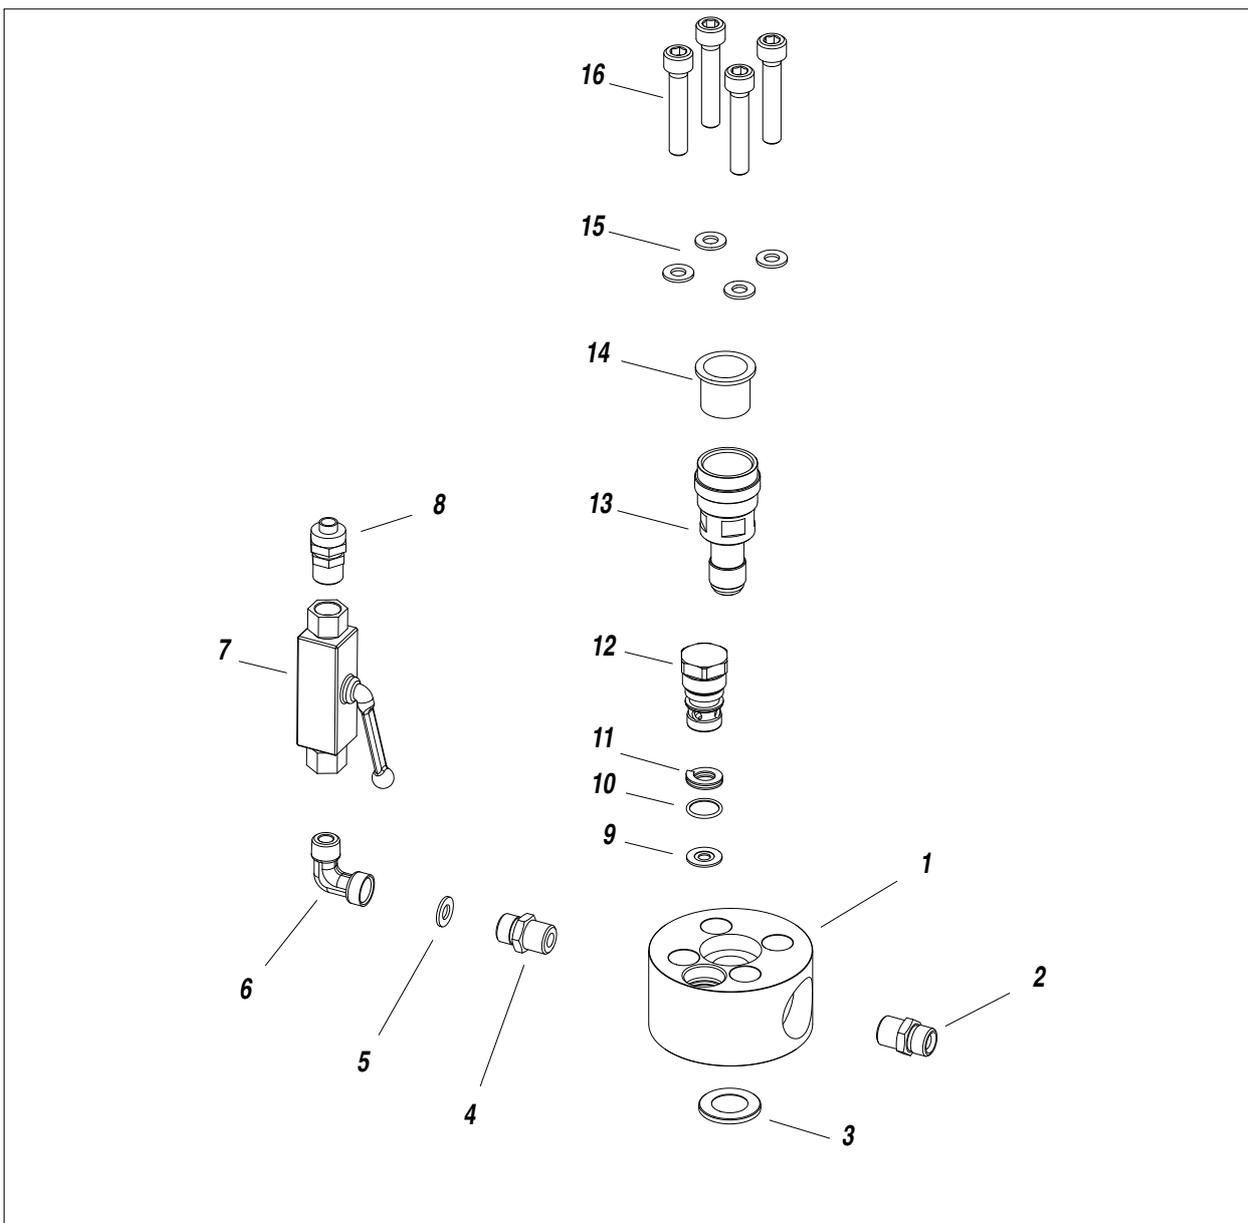


Pos.	Code	Description	Q.ty	Pos.	Code	Description	Q.ty
-	21620	Gravity model assembly	-	9	33026	Seal	1
-	21625	Suction model assembly	-	10	21633	OR 3062	1
1	21635	Colour body	1	11	21632	Ring BK 3062	1
2	95284	Union	1	12	21613	Material valve assembly	1
3	53001	Membrane spacer	1	13	21590	Suction valve assembly	1
4	33011	Union	1	14	96099	Gasket	1
5	33012	Washer 1/4"	1	15	33005	Washer Ø 10	4
6	18614	Elbow	1	16	33004	Screw M10x55	4
7	33013	Stopcock 1/4"	1				
8*	16053	Rapid coupling 1/4" - Ø 10	1				

*Coupling that can be used with the vertical circulation system (Ref. 18569) and horizontal system (Ref. 21645)

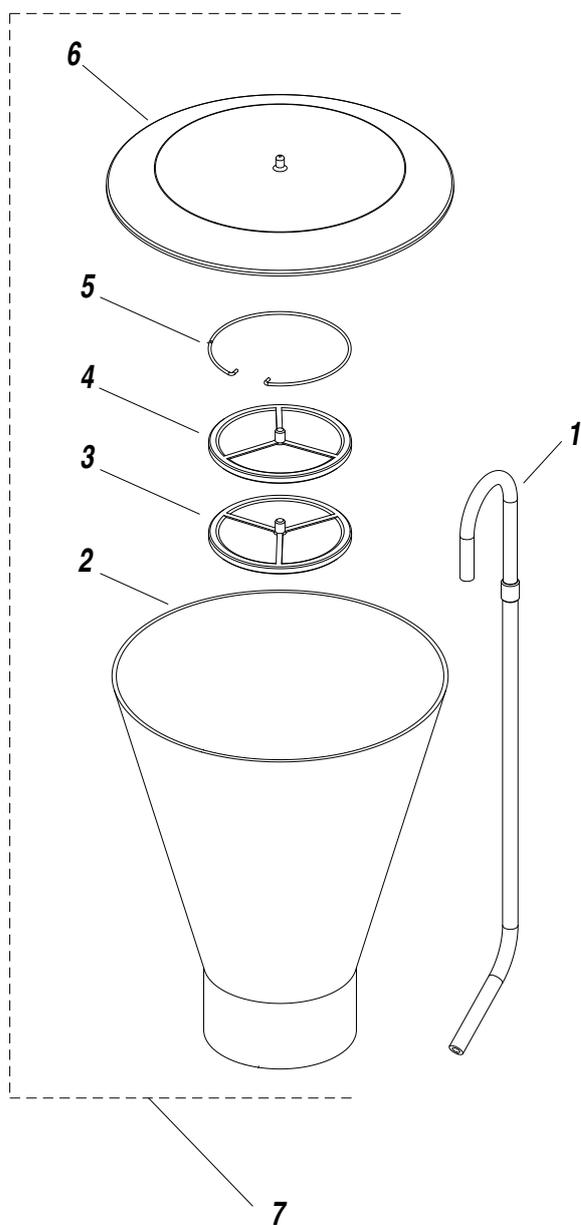Q VERTICAL SUCTION SYSTEM


Pos.	Code	Description	Q.ty
1	18569	Recirculation tube	1
2	35103	Tank	1
3	35006	Close filter	1
4	35007	Large filter	1
5	35008	Spring ring	1
6	55000	Cover	1
7	35101	Tank assembly	1

R HORIZONTAL SUCTION SYSTEM

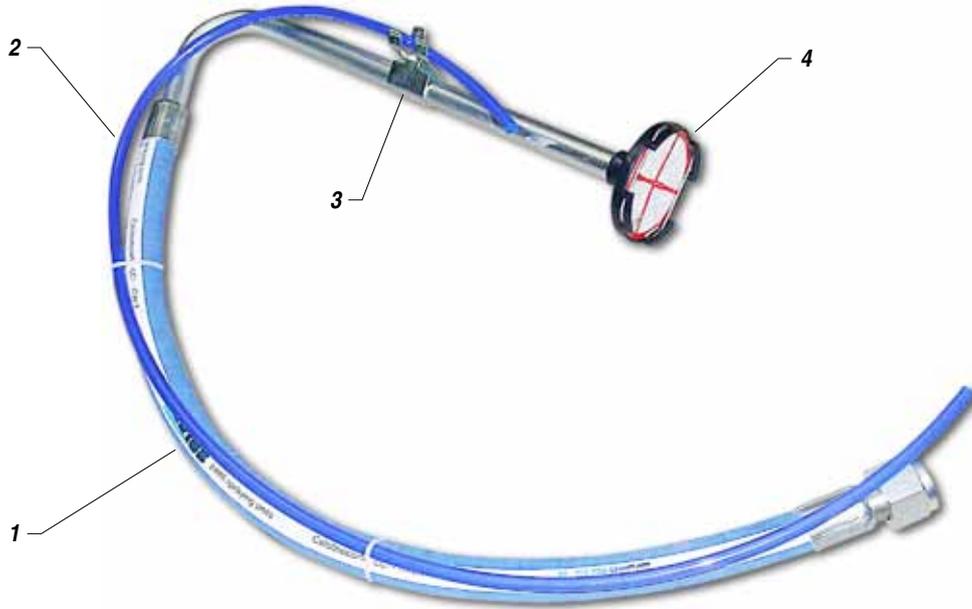

Pos.	Code	Description
-	21645	Suction systems
1	21646	Suction tube
2	18170	Recirculation tube
3	18095	Spring
4	21647	Filter of suction

S HIGH PRESSURE GUN "AT 250"

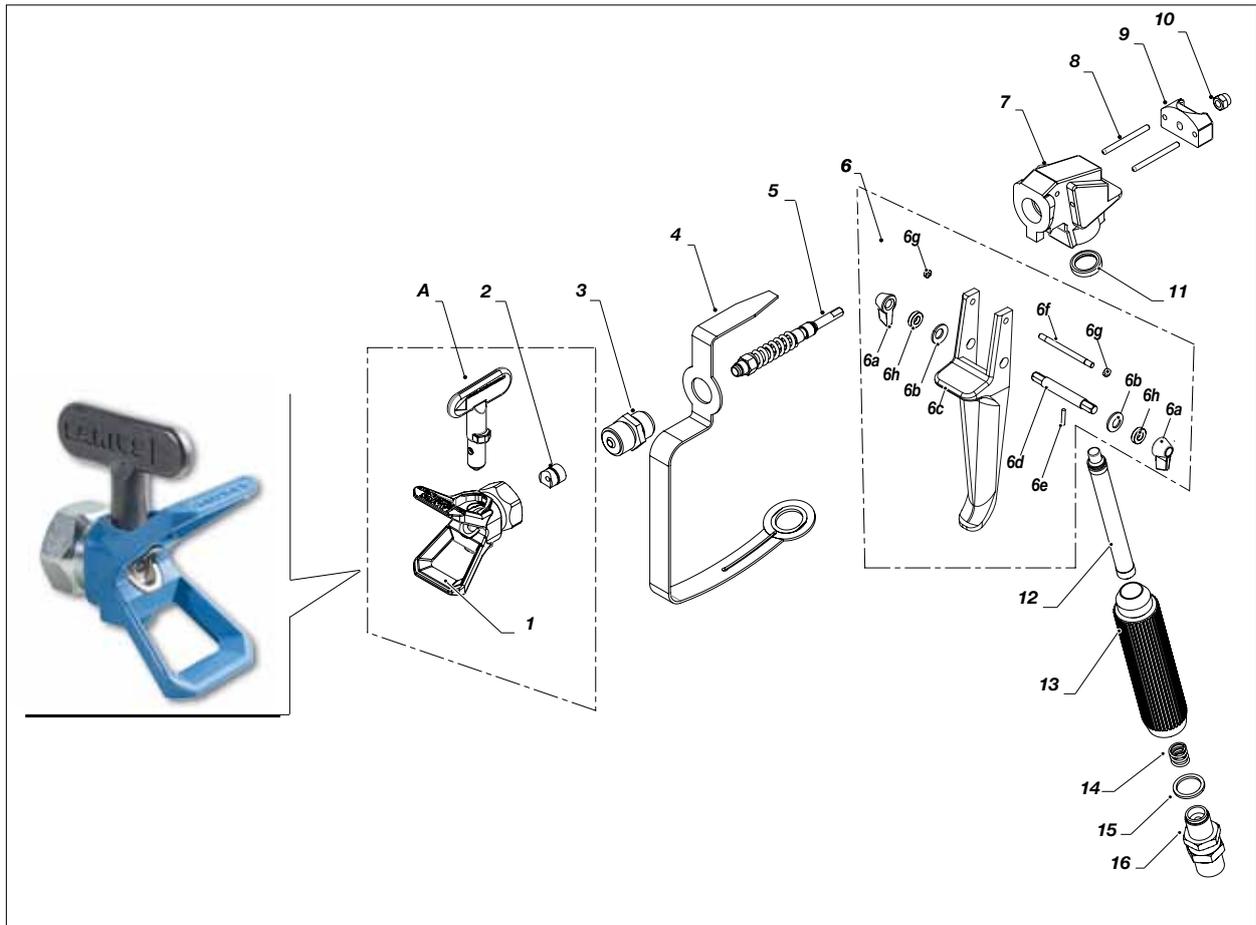


Components Pos. 5 - 11023 - Linkage

11005/3	Ball
11204/1	Ball housing
11205/2	Spring
11205/4	Linkage
11205/5	Sleeve
11205/6	Ring sleeve
11205/7	Bushing

Pos.	Code	Description	Pos.	Code	Description
A	See table*	Nozzle Super Fast Clean	6g	11027	Nut M3
1	18270	Body Super Fast Clean	6h	11016	Washer
2	18280	Gasket Super Fast Clean	7	11206	Gun body
3	11004	Sleeve	8	11207	Spinet
4	11006 + 11032	Safety for hand + 3 screws TSP 3x8	9	11208	Plate
5	11203	Complete linkage	10	11209	Self-locking nut M5
6	11008	Trigger gun	11	11020	Copper gasket
6a	11010	Safety lever	12	-	Filter
6b	11011	Brake washer	13	11018	Handgrip
6c	11009	Trigger	14	11017	Spring
6d	11012	Pin	15	32010	Copper gasket
6e	11013	Pin	16	11015	Articulated joints M16x1,5
6f	11034/1	Pin		11155	Articulated joints 1/4"


T TROLLEY ASSEMBLY

WHEELED CARRIAGE ASSEMBLY

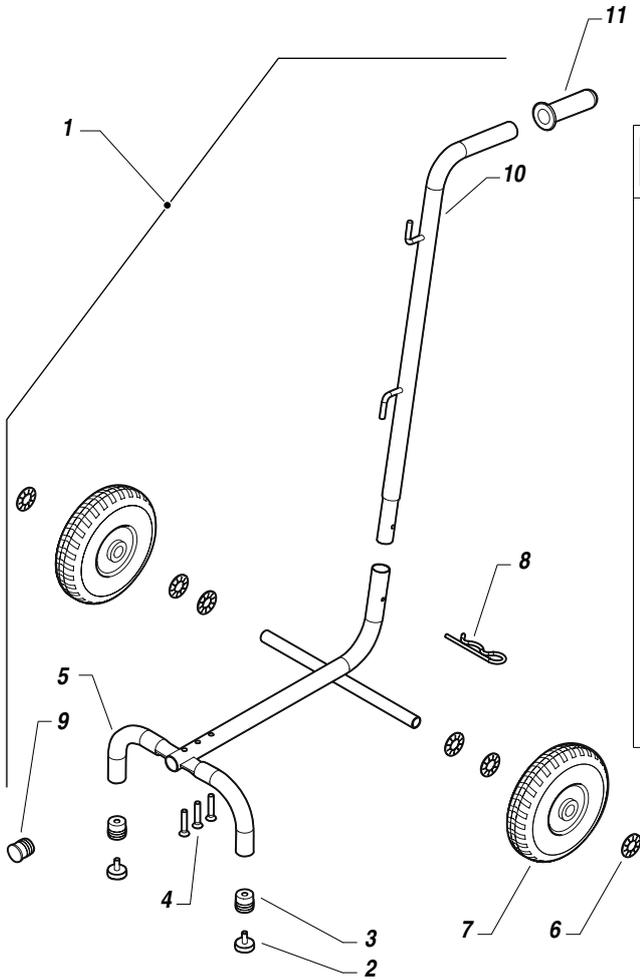

Pos.	Code	Description	Q.ty
1	21680	Complete assembly	1
2	12454	Vibration damper	2
3	21652	Threaded cap	2
4	69014	Screw	3
5	21681	Carriage	1
6	91047	Stop washer	6
7	21682	Pneumatic wheel	2
8	21683	Split pin	1
9	21688	Plug	1
10	21685	Handle	1
11	21654	Knob	1


FIXED CHASSIS ASSEMBLY

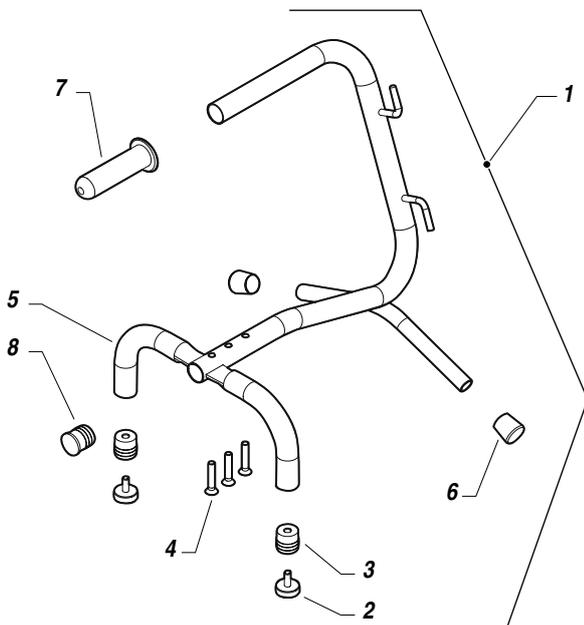

Pos.	Code	Description	Q.ty
1	21650	Complete assembly	1
2	12454	Vibration damper	2
3	21652	Threaded cap	2
4	21671	Screw	3
5	21651	Trolley	1
6	21653	Plug	2
7	21654	Knob	1
8	21688	Plug	1


PETROL ENGINE CARRIAGE

English

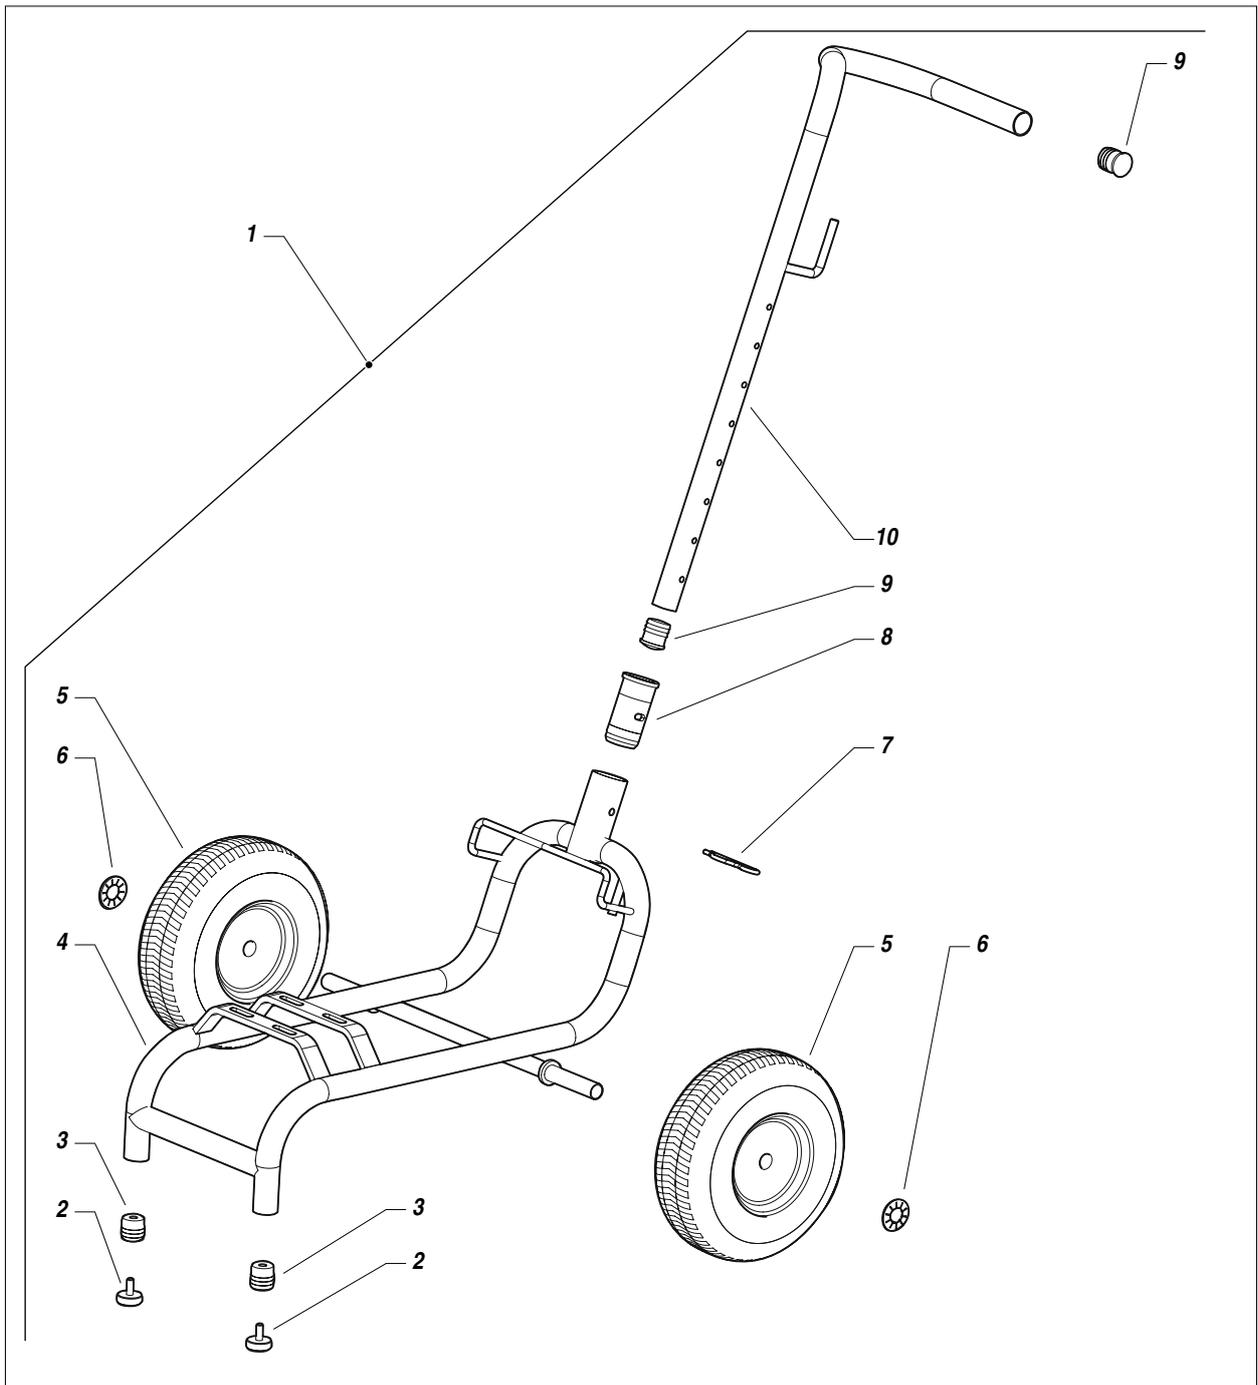

Pos.	Code	Description	Q.ty	Pos.	Code	Description	Q.ty
1	18911	Complete carriage	1	6	91047	Wheel stop washer	2
2	12454	Vibration damper foot	2	7	18902	Split pin	1
3	12473	Threaded cap	2	8	18914	Bushing	1
4	18913	Trolley frame	1	9	95159	Pipe cap	2
5	37218	Pneumatic wheel	2	10	18912	Handle	1

U COMPLETE PETROL ENGINE CASING

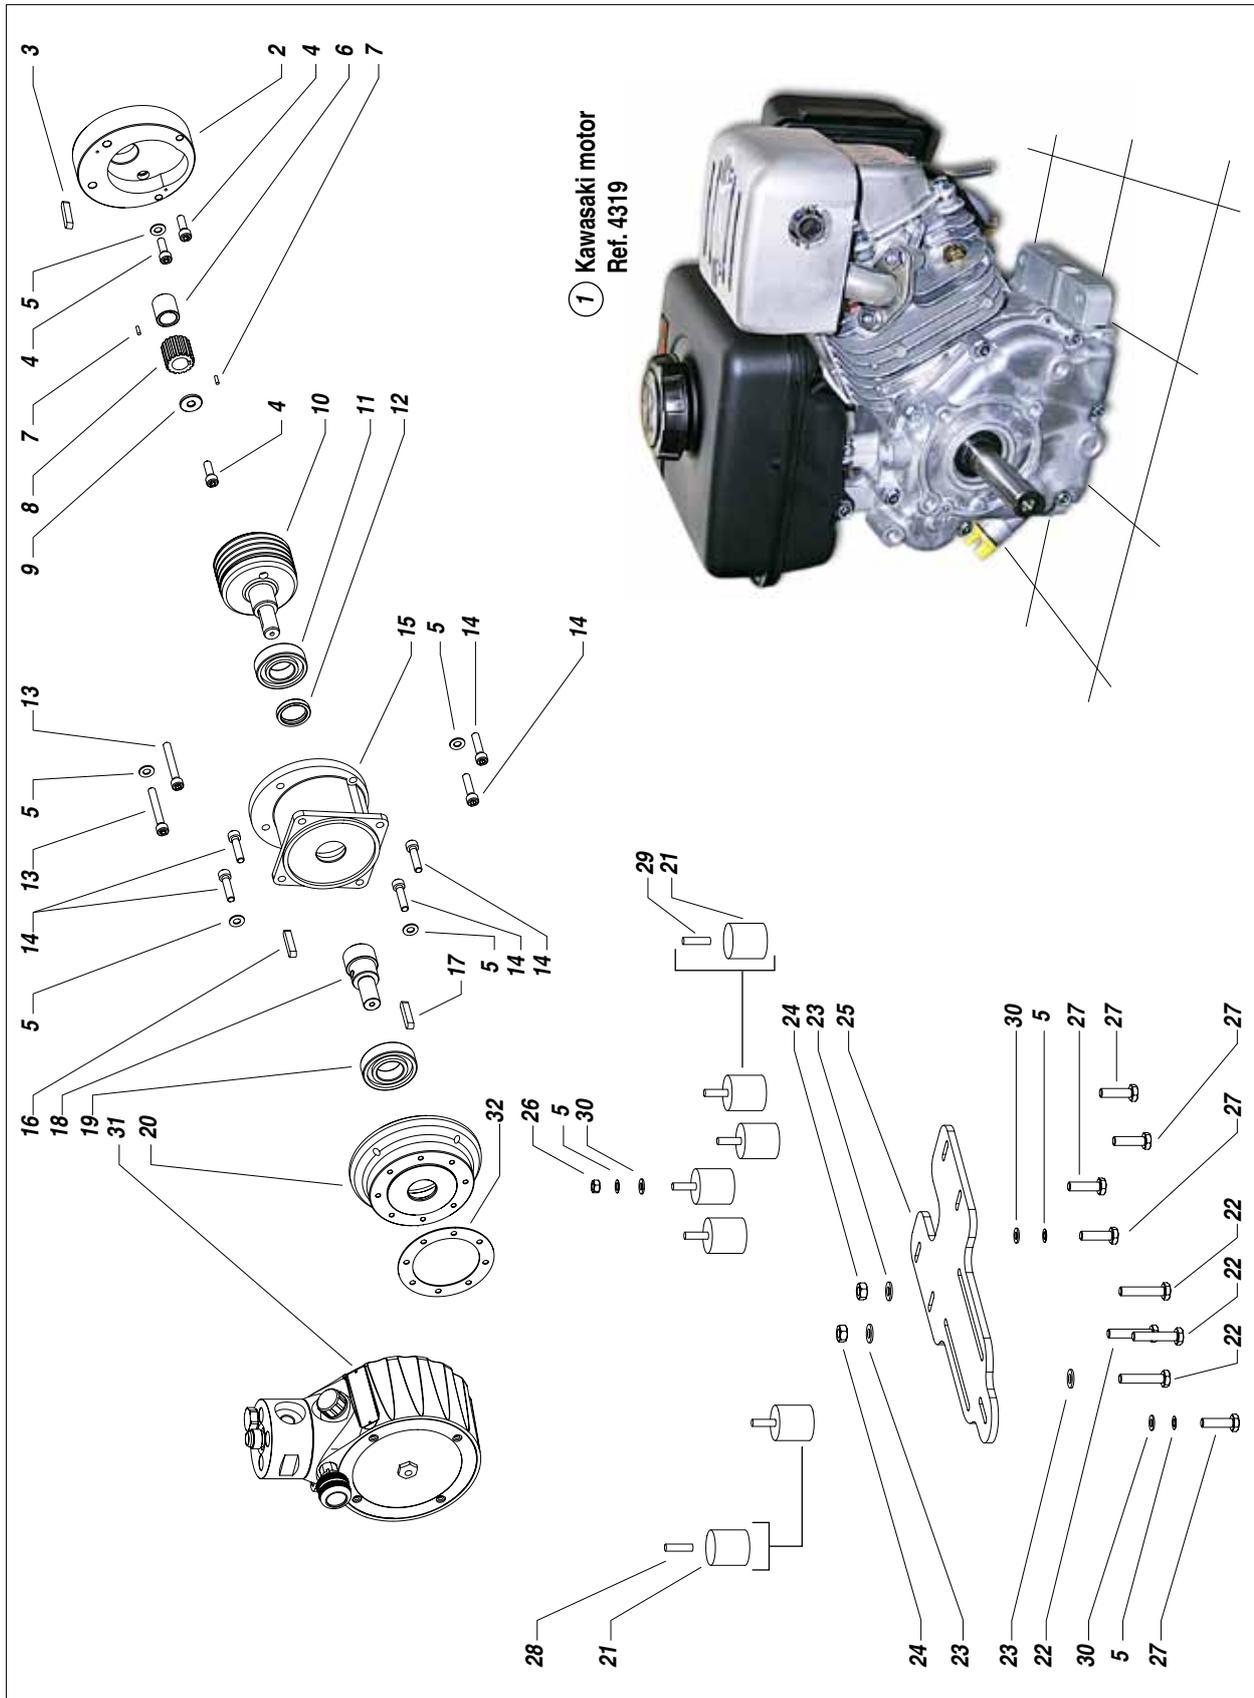

Pos.	Code	Description	Pos.	Code	Description
1	4319	Motor	17	21693	Tab
2	4237M	Motor flange	18	21690	Coupling extension
3	4244M	Machined tang	19	31125	Bearing
4	18935	Screw	20	21691	Connection flange
5	34009	Washer	21	81107	Shock absorber
6	4238M	Spacer	22	95156	Screw
7	4233	Pin	23	81033	Washer
8	4239M	Toothed pinion	24	95158	Nut
9	4241M	Tightening ring	25	21692	Fixing plate
10	4240M	Crown gear	26	52017	Nut
11	42255	Bearing	27	34008	Screw
12	31128	Corteco	28	18941	Threaded pin
13	18934	Screw	29	18942	Threaded pin
14	901568	Screw	30	32024	Flat washer
15	4236M	Reduction flange	31	21694	Technical data plate
16	18916	Tab	32	21531	Seal motor

V ACCESSORIES



PISTON GUNSTOCK FILTERS

Code 11039: Green (30M) - **Code 11038:** White (60M)
Code 11037: Yellow (100M) - **Code 11019:** Red (200M)



Code 11250: AT 250 1/4"
Code 11200: AT 250 M16x1,5



MX 750

MX 1000 E

MX 1100 E

Code 217550: MX 750 - **Code 217560:** MX 1000 E - **Code 217570:** MX 1100 E



DROP TANK



SUCTION BELL KIT

Code 35004: FILTER BELL - **Code 35006:** FILTER 100 MESH
Code 35007: FILTER 50 MESH - **Code 35007/1:** FILTER 30 MESH



Code 147: HIGH PRESSURE GAUGE M16x1,5
Code 150: HIGH PRESSURE GAUGE GJ 1/4"



HIGH PRESSURE HOSE 3/8" - M16x1,5 max pressure 425 bar
Code 18063: 7,5 mt
Code 18064: 10 mt
Code 18065: 15 mt




ANTISTATIC HOSE 3/16" - M16x1,5 max pressure 210 bar
Code 6164: 5 mt
Code 55050: 7,5 mt
Code 35018: 10 mt



ANTIPULSATIONS 1/4" - M16x1,5 max pressure 250 bar
Code 35013: 5 mt
Code 35014: 7,5 mt
Code 35017: 10 mt
Code 18026: 15 mt

SUPER FAST-CLEAN

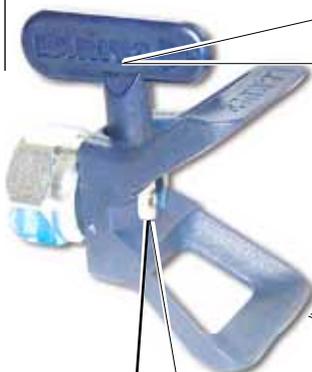

SUPER FAST-CLEAN TIP

Nozzles code		
SFC07-20	SFC19-60	SFC29-80
SFC07-40	SFC21-20	SFC31-40
SFC09-20	SFC21-40	SFC31-60
SFC09-40	SFC21-60	SFC31-80
SFC11-20	SFC23-20	SFC33-40
SFC11-40	SFC23-40	SFC33-60
SFC13-20	SFC23-60	SFC33-80
SFC13-40	SFC25-20	SFC39-40
SFC13-60	SFC25-40	SFC39-60
SFC15-20	SFC25-60	SFC39-80
SFC15-40	SFC27-20	SFC43-40
SFC15-60	SFC27-40	SFC43-60
SFC17-20	SFC27-60	SFC43-80
SFC17-40	SFC27-80	SFC51-40
SFC17-60	SFC29-20	SFC51-60
SFC19-20	SFC29-40	SFC51-80
SFC19-40	SFC29-60	



Code 18280: GASKET



Code 18270: SUPER FAST-CLEAN base UE 11/16x16



GUN EXTENSION

Art. 153: cm 30 - Art. 153: cm 40

Art. 155: cm 60 - Art. 158: cm 80 - Art. 156: cm 100



PLA 1/4"

+ BASE SUPER
FAST-CLEAN

Art. K11420-K11425-K11430: cm 130-180-240

PLA M16x1,5
+ BASE SUPER
FAST-CLEAN

Art. K11421-K11426-K11431: cm 130-180-240



Art. 16780: TELESCOPIC PAINT ROLLER


complete with:

n. 1 Roller with extra-long fiber


n. 1 Roller with long fiber

n. 1 Roller with medium fiber


Flexible hose mt. 2 3/16 " M16x1,5

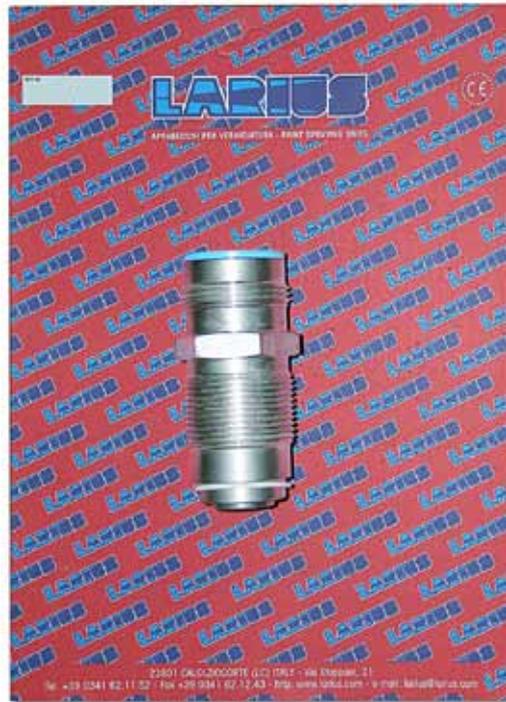

Art. 21590: COMPLETE SUCTION VALVE KIT

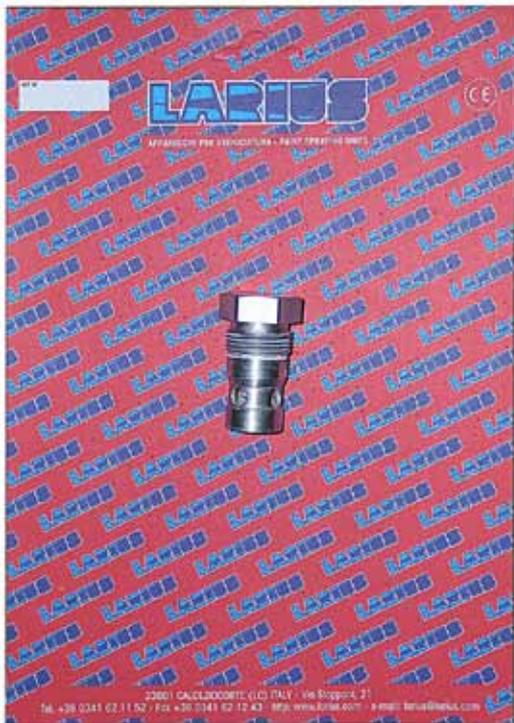

Art. 21613: COMPLETE PRESSURE VALVE

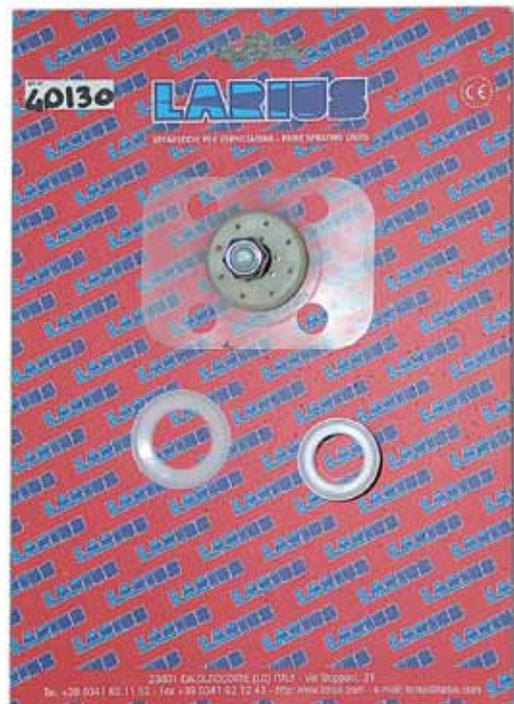

Art. 40130: COMPLETE MEMBRANE KIT

Z VERSIONS



Ref.21500: MIRO'TROLLEY MOUNTED WITHOUT SPRAYING ACCESSORIES



Ref.21501: MIRO'TROLLEY MOUNTED WITH SPRAYING ACCESSORIES



Ref. 21564: MIRO' FRAME MOUNTED WITHOUT SPRAYING ACCESSORIES




Ref.21565:MIRO' FRAME MOUNTED WITH SPRAYING ACCESSORIES

LARIUS

PAINT SPRAYING EQUIPMENT

*L'innovazione.
Quella vera.*

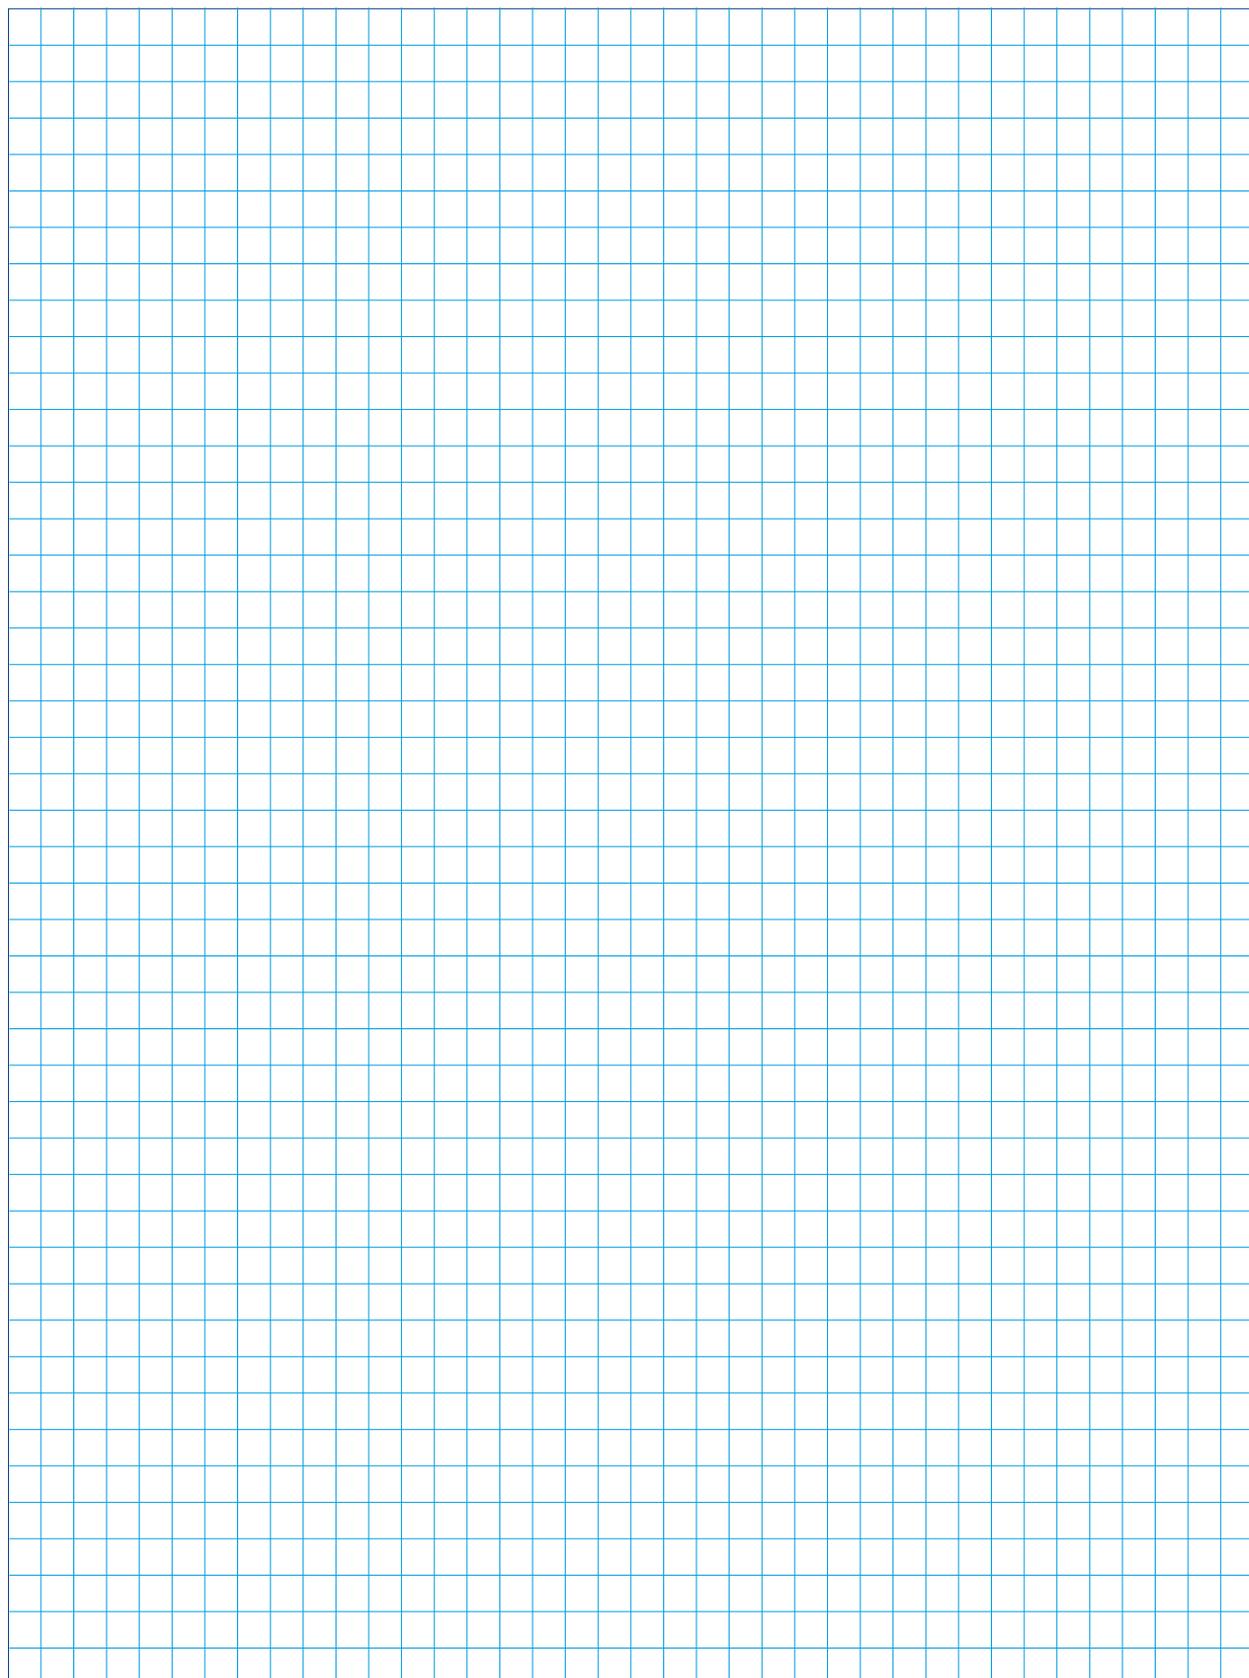

AIRLESS DIAPHRAGM PUMPS



VIKING Rif. 18741



GIOTTO Rif. 12450



DALI' Rif. 18900

MANUFACTURER:

LARIUS®

23801 CALOLZIOCORTE - LECCO - ITALY - Via Antonio Stoppani, 21
Tel. (39) 0341/62.11.52 - Fax (39) 0341/62.12.43
E-mail: larius@larius.com - Internet <http://www.larius.com>



DIRECT LINE

CUSTOMERS TECHNICAL SERVICE

Tel. (39) 0341/621256
Fax (39) 0341/621234