


LATHE OPTIMUM TU 2004V

Reference: 0500P0310

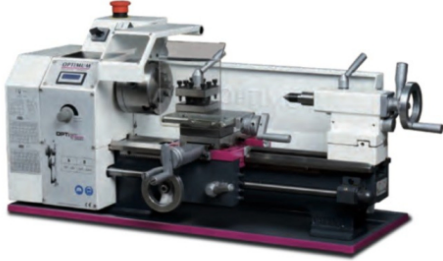

LATHE OPTIMUM TU 2004V

LATHE OPTIMUM TU 2004V with continuous speed adjustment and digital display.

TECHNICAL FEATURES OF THE OPTIMUM TU 2004V LATHE

Product type : Lathe
Tip height: 100 mm
Diam. turning on pallet: 200mm
Distance between points: 300 mm
Spindle speed, infinitely adjustable: 150 - 2500 rpm
Lathe speed number: 2
Spindle cone: cm 3
Bar passage: diam. 21 cm
Pallet width: 100 mm
Upper slide stroke: 55 mm
Cross slide stroke: 75 mm
Tailstock cone: cm 2
Tailstock-tailstock stroke: 65 mm
Longitudinal lathe feed: 0.1 to 0.2 mm/revolution
Metric threading: from 0.25 to 3 mm/revolution
Thread inches: 44 - 8 threads/1".
Length: 830 mm
Width: 425 mm
Height: 360 mm
Weight: 61 Kg.
lathe motor power: 600 W 230 V - 50 Hz

images and technical data not binding

Technical Sheet

Phase	Single phase
Frequency (Hz)	50
Voltage (V)	230
Power (KW)	0.6
Length (mm)	830

Width (mm)	425
Height (mm)	360
Product type	Lathe
Weight (Kg)	61
