


ECOFLOW DOUBLE-SIDED SOLAR PANEL 220W PORTABLE BATTERY CHARGING

Reference: 5006401007

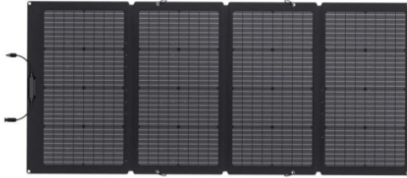

ECOFLOW DOUBLE-SIDED SOLAR PANEL 220W PORTABLE BATTERY CHARGING

The solar panel ECOFLOW bifacial has a 220 W primary side and a 155 W side on the back for ambient light. With this feature it captures up to 25% more solar energy and charge your portable battery even faster.

The slim one-piece tempered glass design makes it five times more durable than comparable panels; it can withstand temperatures up to 150°C.

It comes with its own carrying case so you can take it anywhere. Once it arrives at your destination, simply open it up and use it as a tripod to get the right exposure to the sun.

The 220 W EcoFlow solar panel is dust and water resistant to withstand all weather conditions, ideal for outdoor activities.

TECHNICAL FEATURES.

Front rated power: 220W
Rear rated power: 155W
Efficiency: 22% -23%
Connector type: MC4
Open circuit voltage: 21.4 V (Vmp 18.2V)
Front short circuit current: 13A (Imp 12A)
Rear short circuit current: 8.8A (Imp 8.4A)
Cell type: Monocrystalline silicon
Operating and storage temperature: -20 ° C to 85 ° C
Dimensions: 820 x 1830 x 25 mm
Weight: 9.5 kg

Looking for a product with different technical characteristics? [HERE](#) you can find the area dedicated to portable batteries or UPS units.

Images and technical data are not binding and may be subject to revision by the manufacturer.

Technical Sheet

Nominal power continuous

220 W

Operating temperature (°C)	-20 / 85
Open size (mm)	820 x 1830 x 25
Weight (Kg)	9.5
Efficiency	22% - 23%
