

> a LED entry-level lighting balloon with a good power to light efficiency ratio

sirocco LED 50 000 lm



standard version




Sirocco by Airstar

dimensions and packaging

Envelope size	ø 90 cm / h 60 cm
P500TA stand height	from 160 to 530 cm
Net weight of the balloon	7 kg
PVC cylinder case	
Cylinder case dimensions	L 100 x l 26 cm
Content: full set lighting balloon with LED (without stand), 1 user manual, 1 glove, 1 repair patch kit	
Net weight without stand	10 kg

lighting data

Open core area lighting requirement (EN1838 standard)	3 000 m ²
Very low risk area lighting requirement for safety and security (EN12464-2 standard)	615 m ²
Light under the balloon (at 4 m high)	205 lx
Maximum lumen	50 000 lm
Colour temperature: daylight	6 000 K

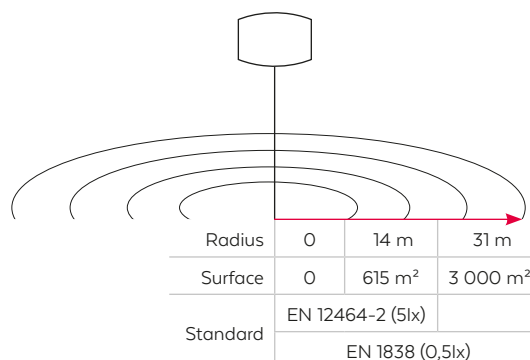

How to read the drawing: in a range of 14 m, being a surface of 3 000 m², we guarantee a lighting in accordance with the EN1838 standard.

technical data

Lamps	4 x 100 W LED
Average lamp life*	50 000 h
Efficiency	125 lm/W
Type of lamp holder	4 x independent panels [Driver + LED] Quick and easy to replace (4 screws)
Maximum power	400 W
Available voltage	100-120-230 V / 50-60 Hz
Restrike time	instant
Power supply	main power or 1 kVA generator
Envelopes options	multiple envelope colours, without reflector or with reverse reflector

* Under normal conditions of use

safety

Flame-retardant fabric	
Silver internal reflector improving lumens below the balloon, increasing light to the work area and reduce light pollution	
Rain and dust proof material	
Electrical protection	fuse
Wind resistance of the balloon	100 km/h - 60 mph



AIRSTAR headquarters
tel +33 (0) 4 76 13 12 20 - www.airstar-light.com