


ENGINES / AMG 300



Versatile engines featuring a horizontal shaft configuration, they are suitable for a wide array of uses in professional, construction, and agriculture sectors. The AMG 300 model can be installed in agricultural machinery, construction equipment, generators, irrigation and sprayer pumps, compressors, woodworking machinery, power washers, and chippers.

MODEL	AMG 300
ENGINE TYPE	OHV single cylinder engine, Horizontal shaft, Air-cooled, 4-stroke
POWER (Hp/Kw)	10 / 7.4
DISPLACEMENT (cc)	290
RPM	3600
BORE/STROKE RATIO (mm)	80x58
COMPRESSION RATIO	8.2:1
STARTING	Recoil start / Electric (optional)
FUEL TYPE	Unleaded petrol
FUEL TANK CAPACITY (litres)	6
OIL	SAE 10W 40 SJ Multi-grade
OIL PAN CAPACITY (litres)	1.1
"OIL ALERT" DEVICE	Yes (except Shaft F5)
AIR FILTER	Dry / Oil bath
OVERALL DIMENSIONS (mm)	545 x 460 x 430
DRY WEIGHT (Kg)	26

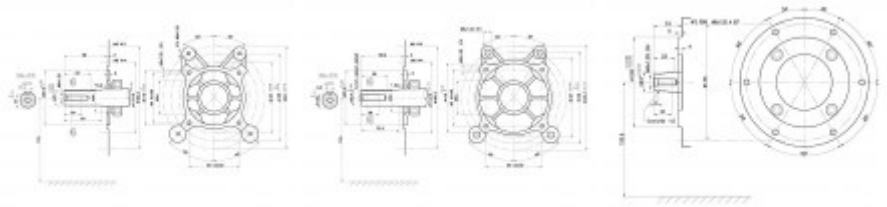

AVAILABLE VARIANTS

AMGE 300 F7	Albero Conico x Generatore Elettrico Ø 22,16 mm, Avv. Elettrico
AMGE 300 F4	Albero Cilindrico Ø 25,4 mm, Avv. Elettrico
AMGE 300 F2	Albero Cilindrico Ø 25,00 mm, Avv. Elettrico
AMG 300 OF5	Albero Conico Ø 23,00 mm, conicità 1:5, filtro bagno olio
AMG 300 F7	Albero Conico x Generatore Elettrico Ø 22,16 mm
AMG 300 F4	Albero Cilindrico Ø 25,4 mm
AMG 300 F2	Albero Cilindrico Ø 25,00 mm

<http://www.axo-group.com/en/products/engines/amg-300.php>

AXO GROUP SRL - Via Spallanzani, 15 - 42024 Castelnovo di Sotto (RE)
Partita IVA, Codice Fiscale IT 02342860356 - Tel: 0522 688175 Fax: 0522 483731