


NEF Series GM N40R 40 KVA Marine Genset

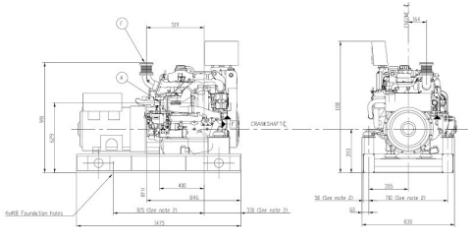

Reference: N45MNAM10

Standard equipment
 Genset without homologations

Engine:

- Rev and hours counter
- Fresh water pump
- Water temperature gauge
- Raw water pump
- Oil pressure gauge
- Oil and fuel filter cartridges
- Voltmeter
- Wet air cleaner

- Starting key
- Fresh water/raw water heat exchanger
- Stop push button
- Raw water cooled exhaust manifold
- Alarm lights
- 24 Vdc insulated return electrical system
- Buzzer
- Lube oil drain pump
- Water temperature sender Terminal box:
 - Oil pressure sender
 - GAC speed control
 - High water temperature sender
 - Overspeed system
 - Low oil pressure sender
 - Local/remote starting switch
 - GAC Electronic speed governor
 - Terminals
- Dry exhaust elbow with flexible joint
- Parallel pre-arrangement
- Baseframe with elastic pads
- Internal test Generator:
 - Single bearing
 - IP23
 - Anticondensation heater
 - Class F
 - Windings treatment against salt and humidity environment

Technical Sheet

Phase	Three phase
Continuous power three phase (KW)	32
Continuous power three phase (KVA)	40
Fuel	Diesel
Frequency (Hz)	50
Voltage (V)	220 / 380
Engine	NEF45AR1M
Engine rpm (rpm)	1500
Speed governor	Electronic
Starting system	Electric
Protection degree	IP23
Motor insulation class	F
Consumption (L/h)	7.7 Lt/h al 75%
Length (mm)	1475
Width (mm)	830
Height (mm)	1180
Dry weight (Kg)	900
Silenced	No
Super silenced	No
Type of alternator	Single Bearing
Engine manufacturer	FPT Iveco