


MG 4010 DM



Control panel

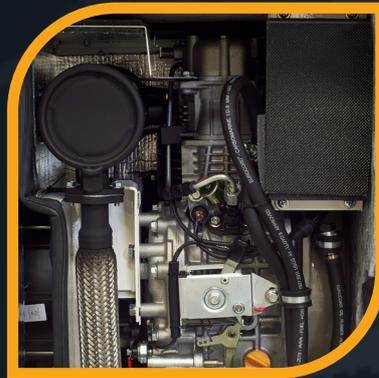

3000 rpm Yanmar engine



Fuel inlet and outlet



Stage V

We offer now what others will do tomorrow.



GenSet s.p.a.

Via Stazione 5 - 27030
Villanova d'Ardenghi (PV) - Italy
Phone: +39-0382-5091

commerciale@genset.it
www.genset.it

 **GenSet**
Next Gen technology
for top business.

VEHICULAR GENERATOR
OUTPUT POWER 4 kVA SINGLE-PHASE
YANMAR DIESEL ENGINE 3000 RPM
SUPER-SILENCED VERSION

<p>Standard Features</p>	<ul style="list-style-type: none"> • Remote control panel with: multifunction display showing single-phase generator voltage, battery voltage, frequency, hour meter, rpm • Start / Stop button • Connection cable to remote panel • Safety shutdown in case of: low oil level, high water temperature • Engine failure warning lights • Hourmeter • Circuit breaker for the generator protection • General shutdown switch • External muffler
<p>Options available as factory options</p>	<ul style="list-style-type: none"> • 20 lt plastic fuel tank with brackets • 20 lt steel fuel tank with brackets • Fuel reserve indicator kit • Fuel filler with key lock cap • 1 mt fuel pipe for connection tank-fuel filler • Fuel pipe I/O to the automatic tank
<p>Noise level</p>	<ul style="list-style-type: none"> • Lwa 89 (64 dB a 7 mt)
<p>AC generator - 50Hz</p>	<ul style="list-style-type: none"> • Type: synchronous • Single-phase power (max.): 4 kVA - 230V • Power Factor: $\cos \phi$ 0,8
<p>Diesel Engine 3000 rpm</p>	<ul style="list-style-type: none"> • Type: Yanmar L70V - 1 cil. - 6 hp (4,5 kWm) - 320 cm³ • Cooling system: air • Starting system: electric • Fuel consumption @ 75%: 1 lt/h
<p>Other features</p>	<ul style="list-style-type: none"> • Insulation Class: H • Ambient temperature: 40 °C (*) • Altitude: 1000 mt (*) • Mechanical Protection: IP 23 • Dimensions (L x W x H): 640 x 500 x 500 mm • Dry weight: 120 kg

(*) - For altitude and temperature values higher than those listed above, please consult the manufacturer to verify the available power.
In line with our continued development, innovation and voice of customer program, we reserve the right to change data without notice.