


## ENGINES / AMG 210



Versatile engines featuring a horizontal shaft configuration, they are suitable for a wide array of uses in professional, construction, and agriculture sectors. AMG 210 engines can be installed in agricultural machinery, construction equipment, generators, irrigation and sprayer pumps, compressors, woodworking machinery, power washers, and chippers.

MODEL	AMG 210
ENGINE TYPE	OHV single cylinder engine, Horizontal shaft, Air-cooled, 4-stroke
POWER (Hp/Kw)	6.8 / 5
DISPLACEMENT (cc)	208
RPM	3600
BORE/STROKE RATIO (mm)	70x54
COMPRESSION RATIO	8.2:1
STARTING	Recoil start
FUEL TYPE	Unleaded petrol
FUEL TANK CAPACITY (litres)	3
OIL	SAE 10W 40 SJ Multi-grade
OIL PAN CAPACITY (litres)	0.5
"OIL ALERT" DEVICE	Yes (except Shaft F5)
AIR FILTER	Dry / Oil bath
OVERALL DIMENSIONS (mm)	400 x 360 x 400
DRY WEIGHT (Kg)	16

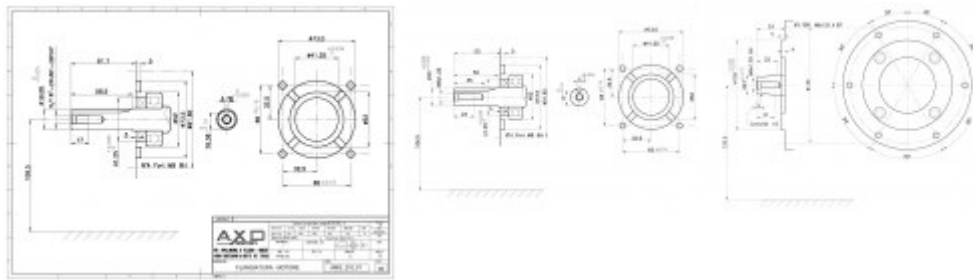

## AVAILABLE VARIANTS

AMG O Kit	Oil bath filter kit
AMG 210 OF5	Tapered Shaft Ø 23.00 mm, 1:5 cone, oil bath filter
AMG 210 F6	Tapered Shaft x Electric Generator Ø 19.84 mm
AMG 210 F3	Cylindrical shaft Ø 20.00 mm
AMG 210 F1	Cylindrical shaft Ø 19.05 mm

<http://www.axo-group.com/en/products/engines/amg-210.php>

AXO GROUP SRL - Via Spallanzani, 15 - 42024 Castelnovo di Sotto (RE)  
Partita IVA, Codice Fiscale IT 02342860356 - Tel: 0522 688175 Fax: 0522 483731