


## NANNI QLS47T MARINE GENERATOR 47.2KVA

Reference: QLS47T

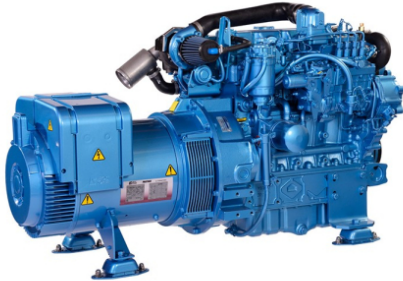

### NANNI QLS47T MARINE GENERATOR 47.2KVA

NANNI QLS47T is a three-phase marine generator equipped with a Kubota engine, 4-stroke with Diesel power supply capable of delivering a maximum power of 47.2.

The NANNI QLS47T generator is equipped with a fast-heating injector and glow plug and are located in the combustion chamber, ensuring that the engine will start even at low temperatures. The cooling system allows the engine to run at an optimal temperature. In the case of closed loop heat exchanger cooling, the coolant is cooled by seawater passing through the exchanger.

NANNI QLS47T is complete with freshwater and saltwater exchanger. Also available with keel cooling system, also known as Keel Cooling. Accessible seawater pump with rubber impeller.

Instrument panel allows you to start and stop the generator, and provides you with important information about the generator set when it is running.

The alternator of the NANNI QLS47T provides 34.4 KW in continuous operation and can produce up to 37.8 KW. Protection level IP23 (protection level available on request).

#### NANNI QLS47T TECHNICAL FEATURES

Phase Type: Three Phase  
Maximum Power: 37.8 KW  
Continuous Power: 34.4 KW  
Maximum Power: 47.2 KVA  
Continuous Power: 43.0 KVA  
Fuel: Diesel  
Voltage: 400 V  
Frequency: 50 Hz  
Engine: Kubota, 4-stroke  
Start: Electric  
Isolation Class: H  
Protection Class: IP23  
Consumption: 8.0 Lt/h at full load  
Length: 1327 mm  
Width: 636 mm  
Height: 792 mm  
Weight: 561 Kg

Are you looking for a marine power generator with different technical features? [Here](#) you can find the full range NANNI or other

brands specializing in the field.

The image and technical data are not binding and may be subject to revisions by the manufacturer.

## Technical Sheet

Phase	Three phase
Maximum power three phase (KW)	37.8
Continuous power three phase (KW)	34.4
Maximum power three phase (KVA)	47.2
Continuous power three phase (KVA)	43.0
Fuel	Diesel
Frequency (Hz)	50
Voltage (V)	400
Engine	Kubota, 4 stroke
Engine rpm (rpm)	1500
Starting system	Electric
Number cylinders	4
Cylinders' position	In line
Cooling	Water
Inyección	Indirect (E-TVCS)
Alternator	Electronic regulator
Consumption (L/h)	8 at 100% of the load
Length (mm)	1327
Width (mm)	636
Height (mm)	792
Dry weight (Kg)	561
Silenced	No