


## OPTIMUM TU 2807 230V PARALLEL LATHE WITH FEED GEAR BOX

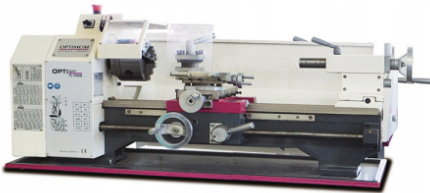

Reference: 0500P7001

### OPTIMUM TU 2807 230V PARALLEL LATHE WITH FEED GEAR BOX

Optimum TU 2807 is a professional lathe with silent feed gearbox, with rounded shape and in oil bath.

This parallel lathe is equipped with a powerful motor that does not require maintenance. It is equipped with a prismatic bench built in cast iron with ribs for reinforcement. Optimum TU2807 is equipped with hardened and ground bed guides.

The spindle nose concentric rotation accuracy is & lt; 0.009mm while the self-centering concentric rotation accuracy is & lt; 0.04mm. Right-left rotation can be set from the control panel.

The lead screw is mounted on 2 bearings. The Optimum TU 2807 lathe allows various types of threading thanks to the gear set. The front panel is equipped with an emergency switch. The tool holder has 4 compartments and all the slides are adjustable with conical gibs. There is also a chip guard on the upper slide.

#### TECHNICAL FEATURES OPTIMUM TU 2807

Motor power: 230V - 0,85Kw - 50Hz  
Center height: 140mm  
Turnable diameter on bed: Ø 266mm  
Distance between centers: 700mm  
Spindle speed: 125/2000 rpm  
Number of speeds: 6  
Spindle cone: CM4  
Bar passage: Ø 26mm  
Bed width: 180mm  
Upper slide stroke: 60mm  
Cross slide travel: 160mm  
Tailstock cone: CM2  
Tailstock-quill travel: 85mm  
Longitudinal feed: 0.07 / 0.4mm / rev  
Metric pitch thread: 0, 2 / 3,5mm / rev  
Inch thread: 44/8 thread / 1"  
Width: 1370 mm  
Length: 640 mm  
Height: 535 mm  
Weight net: 180kg

Are you looking for a different product? Find the right product for you on our website [Manelservice.com](http://Manelservice.com)

Images and technical data not binding

## Technical Sheet

Phase	Single phase
Frequency (Hz)	50
Voltage (V)	230
Power (KW)	0.6
Length (mm)	640
Width (mm)	1370
Height (mm)	535
Product type	Lathe
Weight (Kg)	180